

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES


Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problems Mailbox.**



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 452 671 A2

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 91103733.1

(51) Int. Cl.⁵: **F01L 1/26**, **F01L 31/22**,
F01L 1/20

(22) Date of filing: 12.03.91

(30) Priority: 14.03.90 JP 24892/90
20.03.90 JP 27683/90
20.03.90 JP 68276/90

(43) Date of publication of application:
23.10.91 Bulletin 91/43

(84) Designated Contracting States:
DE FR GB

(71) Applicant: **SUZUKI KABUSHIKI KAISHA**
300 Takatsuka, Kamimura
Hamana-Gun, Shizuoka-Ken(JP)

(72) Inventor: **Kaku, Shinji**
1287-1-A201 Higashiwakabayashi, Kamimura
Hamana-Gun, Shizuoka-Ken(JP)
Inventor: **Shinkai, Tatsuya**
319-4, Koyasu-Cho
Hamamatsu-Shi, Shizuoka-Ken(JP)

(74) Representative: **Klunker . Schmitt-Nilson .**
Hirsch
Winzererstrasse 106
W-8000 München 40(DE)

(54) Valve actuating mechanism in four-stroke cycle engine.

(57) A valve actuating mechanism disposed in a four-stroke cycle engine in which exhaust and suction valves are disposed, comprises a rocker shaft (11) rotatably supported to a cylinder head (21) of an engine unit and having eccentric large-diameter portions (12,13) formed as bushings on the way of the rocker shaft, rocker arms including a first rocker arm (7) rotatably mounted directly on the rocker shaft and second and third rocker arms (8,9) rotatably mounted on the bushings with the first rocker arm being interposed therebetween, and a cam assembly including first, second and third cam members (3,4,5) which drives the first, second and third rocker arms, respectively. The second and third cams have the same cam profiles and the first cam has a cam profile different from those of the second and third cams. A driving mechanism for rotating the rocker shaft is connected to one end of the rocker shaft and comprises a hydraulic cylinder (15), a rack (16) connected thereto and a pinion (17) formed on the one end of the rocker shaft so as to be engaged with the rack from the upper side of the cylinder head. A stopper mechanism for controlling a sliding position of the rocker shaft is composed of a stopper groove formed to the cylinder head, a stopper screw (36)

engaged with the stopper groove (32) and a stopper member disposed to the other end portion of the rocker shaft.

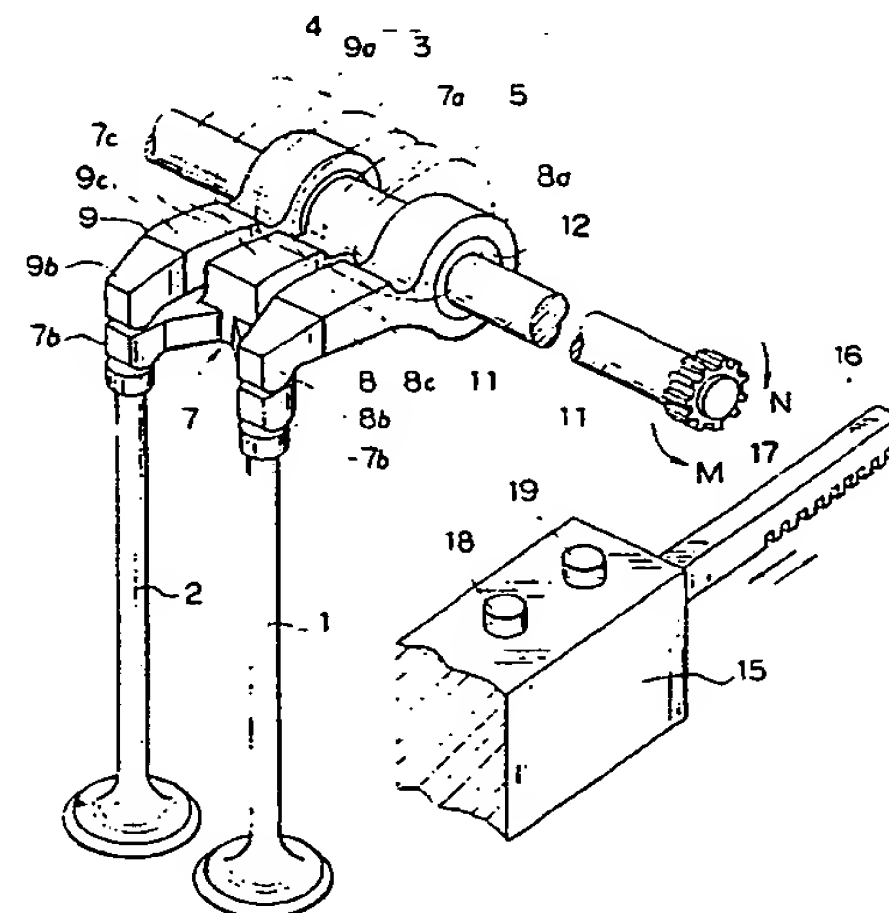


FIG. 1

EP 0 452 671 A2

BACKGROUND OF THE INVENTION

This invention relates to a valve actuating mechanism disposed in a four-stroke cycle engine which is capable of varying such as the lift and the timing for the opening operation of suction and exhaust valves in accordance with the operating conditions, and more particularly, relates to a valve actuating mechanism in which the changing of a shim provided at a valve stem head may be effectively performed, abrasion of a rocker shaft bearing supporting a rocker shaft formed to a cylinder head of the engine can be effectively prevented, and the arrangement of a driving source of the rocker shaft is improved.

Usually, a four-stroke cycle engine to be mounted on a vehicle such as an automobile and a motorcycle is provided with suction and exhaust valves at above its combustion chamber and these valves are driven by a valve actuating mechanism. Specifically, the valve actuating mechanism is provided with a crank shaft of the engine so that the suction and exhaust valves are caused to move in an up and down direction at a predetermined timing by means of a cam which is formed on a cam shaft.

It is desirable for a four-stroke cycle engine that a high output may be obtained for a broad speed region extending from a low speed region to a intermediate-high speed region, i.e. that the power band is wide.

However, in a conventional valve actuating mechanism, since the timing for opening or closing a valve and the amount of lift are fixed, only an output characteristic having a peak value at a specific engine speed region may be obtained and one is forced to make a choice as to whether the output characteristic in the low speed region is emphasized or the output characteristic in the intermediate-high speed region is emphasized.

SUMMARY OF THE INVENTION

An object of this invention is to substantially eliminate the defects or drawbacks encountered in the prior art and to provide a valve actuating mechanism of a four-stroke cycle engine which is capable of improving the output in a broad speed region and of which a shim provided at a valve stem head for adjusting the tappet clearance may be effectively changed.

Another object of this invention is to provide a valve actuating mechanism for a four-stroke cycle engine in which a rocker shaft driving source is easily assembled.

A further object of this invention is to provide a valve actuating mechanism for a four-stroke cycle engine in which an abrasion of a rocker shaft

bearing disposed to a cylinder head for supporting the rocker shaft.

These and other objects can be achieved according to this invention by providing a valve actuating mechanism disposed in a four-stroke cycle engine in which exhaust and suction valves are disposed, comprises a rocker shaft rotatably supported to a cylinder head of an engine unit and having eccentric large-diameter portions formed as bushings on the way of the rocker shaft, rocker arms including a first rocker arm rotatably mounted directly on the rocker shaft and second and third rocker arms rotatably mounted on the bushings with the first rocker arm being interposed therebetween, and a cam assembly including first, second and third cam members which drives the first, second and third rocker arms, respectively. The second and third cams have the same cam profiles and the first cam has a cam profile different from those of the second and third cams. A driving mechanism for rotating the rocker shaft is connected to one end of the rocker shaft and comprises a hydraulic cylinder, a rack connected thereto and a pinion formed on the one end of the rocker shaft so as to be engaged with the rack from the upper side of the cylinder head. A stopper mechanism for controlling a sliding position of the rocker shaft further provided and composed of a stopper groove formed to the cylinder head, a stopper screw engaged with the stopper groove and a stopper member disposed to the other end portion of the rocker shaft.

The stopper member is composed of grooves formed to an outer periphery of the one end of the rocker shaft and includes a positioning groove extending in a circumferential direction thereof into which a front portion of the stopper screw is fitted for limiting a rotating position of the rocker shaft and a slide groove being formed continuously to the positioning groove and extending in an axial direction of the rocker shaft in and along which the rocker shaft is slid. A slide hold groove is further formed continuously to the slide groove in the circumferential direction of the rocker shaft for holding the slid position thereof.

With a valve actuating mechanism in a four-stroke cycle engine according to this invention of the characters described above, the rocker shaft is rotated by a predetermined angle to rotate the eccentric large-diameter portion so that the cam follower surfaces of the second and third rocker arms are changed in position with respect to the cam follower surface of the first rocker arm. When the cam follower surfaces of the first and third rocker arms are changed in position downward with respect to the cam follower surface of the first rocker arm, the contact between the second and third rocker arms and the second and third cam are

released to bring the first rocker arm and the first cam into contact with each other so that a suction or exhaust valve of the four-stroke cycle engine is driven by this first cam.

On the other hand, when the cam follower surfaces of the second and third rocker arms are changed in position generally upward or to the same level with respect to the cam follower surface of the first rocker arm, the contact between the first rocker arm and the first cam is released so that the second and the third rocker arms and the second and the third cam are respectively brought into contact where the valve of the four-stroke cycle engine is operated by the second and the third cams. In this way, it is possible to improve the output of the engine for a broad speed region by selecting a cam through a rotation of the rocker shaft.

Furthermore, a slide hold groove is formed on the rocker shaft in continuation from a slide groove and the distal end portion of a stopper screw is accommodated in this slide hold groove so that the slid position of the rocker shaft is retained. Therefore, when the rocker shaft is slid to move the first, second and third rocker arms in order to change a shim at the valve stem head, since there is no need for the operator to hold the slid rocker arm by a hand or the like, the work for changing a shim may be facilitated to improve the efficiency in changing a shim.

Furthermore, since the rack is engaged with the pinion of the rocker shaft from the upper side of the cylinder head, the rack and the rocker shaft driving mechanism can be easily assembled with the cylinder head after the rocker arms, the rocker shaft and the valves are assembled with the cylinder head without sliding the rocker shaft.

Moreover, since the rocker shaft driving mechanism and the stopper mechanism for positioning the rocker shaft rotating position are disposed to both the end portions of the rocker shaft, the torsion is applied during the engine operation to substantially the entire axial length of the rocker shaft. Accordingly, the rocker shaft is never swung even if the rocker arms are violently vertically moved, whereby the abrasion of the rocker shaft bearing portion can be effectively prevented.

BRIEF DESCRIPTION OF THE DRAWINGS

For a better understanding of this invention and to show how the same is carried out, reference is first made, by way of the preferred embodiment, to the accompanying drawings, in which:

Fig. 1 is a perspective view showing one embodiment of a valve actuating mechanism disposed in a four-stroke cycle engine according to this invention;

Fig. 2 is a plan view of the valve actuating mechanism of Fig. 1;

Figs. 3 and 4 are views each showing the valve actuating mechanism of Fig. 1 for the explanatory of the state of operation thereof;

Fig. 5 is a sectional view taken along the line V-V shown in Fig. 6, later mentioned;

Fig. 6 is a partial plan view of a cylinder head to which the valve actuating mechanism is applied;

Fig. 7 is a sectional view taken along the line VII-VII shown in Fig. 6;

Figs. 8A and 8B are perspective views each showing one end of a rocker shaft of the valve actuating mechanism;

Fig. 9 is a sectional view taken along the line XI-XI of Fig. 6;

Fig. 10 is a diagram showing the cam profile of the cam shown in Fig. 1; and

Figs. 11 and 12 are also diagrams each showing the modification of the cam profile shown in Fig. 10.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

An embodiment of this invention will now be described hereunder with reference to the drawings.

A valve actuating mechanism according to this invention is arranged both at the suction side and at the exhaust side of each cylinder of a four-stroke cycle engine. Accordingly, suction and exhaust valves 1 and 2 as shown in Fig. 1 are arranged to perform suction or exhaust.

Referring to Figs. 1 to 4, the embodiment of this invention comprises a cam shaft 6 having a low speed cam as a first cam as well as an intermediate-high speed cam 4 provided as a second cam and another intermediate-high speed cam 5 provided as a third cam which are arranged respectively at one and the other sides of the low speed cam 3, a low speed rocker arm 7 as a first rocker arm, an intermediate-high speed rocker arm 8 as a second rocker arm and another intermediate-high speed rocker arm 9 as a third rocker arm which are provided below the cams 3, 4 and 5, respectively, and a rocker shaft 11 supported in a rotatable manner at a rocker shaft bearing portion 30 (Fig. 5) to be described later and fitted with the supporting portions 7a, 8a and 9a of these rocker arms 7, 8 and 9.

The distal end of the low speed rocker arm 7 is branched into two directions, and the two branched ends 7b are in contact with the stem heads of the suction and exhaust valves 1 and 2, respectively, which open or close a combustion chamber 27 (Fig. 7) of an engine. Further, the supporting portion 7a of the low speed rocker arm 7 is directly

fitted on the rocker shaft 11 in a rotatable manner.

A supporting portion 8a of the intermediate-high speed rocker arm 8 is fitted in a rotatable manner with respect to the rocker shaft 11 by way of an eccentric bushing 12 which has a diameter larger than that of the rocker shaft 11. As shown in Fig. 3, the axis of the eccentric bushing 12 is eccentric from the center of the rocker shaft 11 and is fixed to the rocker shaft 11 in a dismountable and reattachable manner by means of a stopper pin 10. Therefore, this eccentric bushing 12 serves as the eccentric large-diameter portion of the rocker shaft 11.

As shown in Fig. 4, the supporting portion 9a of the intermediate-high speed rocker shaft 9 is also fitted in a rotatable manner with respect to the rocker shaft 11 by way of an eccentric bushing 13 which has an identical configuration and is eccentric in the same direction as the above described eccentric bushing 12. This eccentric bushing 13 is also fixed to the rocker shaft 11 in a dismountable and reattachable manner by means of a stopper pin 10 and serves as the eccentric large-diameter portion.

Further, the lower surfaces of the distal end portions 8b and 9b of the intermediate-high speed rocker arms 8 and 9 are caused to abut against one and the other of the branched distal end portions 7b, respectively, by way of a shim 14a. The points of contact between the branched portion 7b of the low speed rocker arm 7 and the distal end portions 8b and 9b of the intermediate-high speed rocker arms 8 and 9 are provided on approximate axes of the valves 1 and 2, respectively.

Accordingly, as shown in Fig. 3 and Fig. 7, when the cam follower surface of the low speed rocker arm 7 is pushed down by the low speed cam 3 so as to lower the distal end portions 7b, the distal end portions 8b and 9b of the rocker arms 8 and 9 are caused to descend by gravity following the branched distal end portions 7b. On the other hand, as shown in Fig. 4, when the cam follower surfaces 8c and 9c of the intermediate-high speed rocker arms 8 and 9 are pushed down by the intermediate-high speed cams 4 and 5, respectively, the distal end portions 8b and 9b of the rocker arms 8 and 9 push down the distal end portions 7b of the low speed rocker arm 7 so that the distal end portions 7b are forced to descend.

The above described shim 14a is one having a T-shaped longitudinal section and is fitted from the top into the both branched end portions 7b of the low speed rocker arm 7. The valve stem heads of the valves 1 and 2 are each covered by a cylindrical shim 14b having a lid, and the lower surface of the distal end portion 7b of the low speed rocker arm 7 abuts against the shim 14b. These shims 14a and 14b are used for adjusting the tappet

clearance of the valves 1 and 2.

Further, the intermediate-high speed cams 4 and 5 have the same cam profile with each other, and the low speed cam 3 has a cam profile that is different from the cam profile of the intermediate-high speed cams 4 and 5. In other words, for the low speed cam 3, a cam profile is provided so as to obtain a valve lift and the timing of opening or closing the valve which are suitable when the engine is operated at the low speed region. Furthermore, for the intermediate-high speed cams 4 and 5, a cam profile is provided so as to obtain a valve lift and the timing of opening or closing the valve which are suitable when the engine is operated in the intermediate-high speed region.

The valve lifts as described above correspond to the stroke length of the valves 1 and 2 determined by the cam profiles and coincide with the cam lifts. In Fig. 10, the cam profile of the low speed cam 3 is indicated by a solid line A (cam lift 1a) while the cam profile of the intermediate-high speed cams 4 and 5 is indicated by a dashed line B (cam lift 1b). As can be seen from Fig. 10, the cam profile of the intermediate-high speed cams 4 and 5 is provided so as to obtain a valve lift larger than that of the low speed cam.

In Fig. 10, the two-dot chain line C indicates the cam profile of the intermediate-high speed cams 4 and 5 when the rocker shaft 11 is rotated to place the thick walled portions 12a and 13a of the eccentric bushings 12 and 13 at the diagonally frontward position (Fig. 3 and Fig. 7).

As shown in Figs. 1, 5 and 6, the rotation of the rocker shaft 11 is caused by a hydraulic cylinder 15 which is actuated by the oil pressure from the engine. A piston of this hydraulic cylinder 15 is coupled to a rack 16, and the rack 16 is meshed with a pinion 17 which is formed on one end portion of the rocker shaft 11. A drive mechanism is constituted by the hydraulic cylinder 15, rack 16 and pinion 17. A low-speed oil pressure port 18 and a high-speed oil pressure port 19 are provided at the hydraulic cylinder 15, respectively, and the oil pressure from the engine is selectively introduced into each of the ports 18 and 19.

When the speed of the engine is at the low speed region, the oil pressure is supplied to the low-speed oil pressure port 18, pulling back the rack 16 to cause the pinion 17 to rotate in the direction of the arrow M so that as shown in Fig. 3 and Fig. 7 the eccentric bushings 12 and 13 are rotated to place their thick walled portions 12a and 13a at diagonally frontward. Further, when the engine speed is at the intermediate-high speed region, the oil pressure is supplied to the intermediate-high speed oil pressure port 19, pushing out the rack 16 to cause the pinion 17 to rotate in the direction of the arrow N so that as shown in

Fig. 4 the eccentric bushings 12 and 13 are rotated to place their thick walled portions 12a and 13a at diagonally rearward.

In this way, the rocker shaft 11 is constructed such that the thick walled portions 12a and 13a of the eccentric bushings 12 and 13 are rotated in the range from a diagonally frontward position to a diagonally rearward position at all times within the upper half of the rocker shaft 11 by the action of the hydraulic cylinder and others 15, 16 and 17.

The rocker shaft 11, the hydraulic cylinder 15 and others as described above are arranged in a cylinder head 21 as shown in Figs. 5 to 7. A total of four rocker shafts 11 are arranged in the cylinder head 21 each placed toward front and rear and left and right of the vehicle and are extended in a left and right direction of the vehicle. Each of the rocker shafts 11 is supported in a rotatable manner by a rocker shaft bearing portion 30. A lower half bearing part 22 for supporting the cam shaft 6 is formed above each of these rocker shafts 11.

In the vicinity of the lower half bearing part 22, a valve guide 23 (Fig. 6 and Fig. 7) is arranged and a stud bolt hole 24 is formed. Further a joint surface 25 to be attached to a head cover is formed at the upper portion of the cylinder head 21 while a cam chain chamber 26 is formed in the cylinder head 21 at the center in a left and right direction of the vehicle. The hydraulic cylinder 15 and rack 16 are positioned within the cam chain chamber 26.

Furthermore, as shown in Fig. 7, a combustion chamber 27 is formed at the lower portion of the cylinder head 21, and a suction port 28 and an exhaust port 29 are formed in communication with this combustion chamber 27. The valve faces of the valves 1 and 2 are positioned on the boundaries which bound the combustion chamber 27 from the suction port 28 and the exhaust port 29. The suction port 28 and exhaust port 29 are opened or closed by the action of the valve spring 20 as well as of the low speed rocker arm 7 and the intermediate-high speed rocker arms 8 and 9.

As shown in Fig. 6, two sets each consisting of a low speed rocker arm 7 and the intermediate-high speed rocker arms 8 and 9 are mounted on a single rocker shaft 11. The low speed rocker arm 7 and the intermediate-high speed rocker arms 8 and 9 in each set are restricted in position together with the rocker shaft 11 by a positioning spring 31 which is placed on the rocker shaft 11. In other words, the low speed rocker arm 7 and the intermediate-high speed rocker arms 8 and 9 as well as the rocker shaft 11 are pressed toward the center of the cylinder head 21 by the urging force of the positioning spring 31.

As shown in Fig. 5 and Fig. 8A, the rocker shaft 11 on which a pinion 17 is formed at one end

portion is provided at the peripheral surface of the other end portion thereof with a positioning groove 32, a slide groove 33 and a slide hold groove 34 which are continuously curved. The positioning groove 32 is extended along the circumferential direction of the rocker shaft 11 and is formed over the range of rotatable angle of the rocker shaft 11. Further the slide groove 33 is extended in the axial direction of the rocker arm 11 from one or both of the two ends of the positioning groove 32. In Fig. 8A, a case is shown where the slide groove 33 is extended from one end portion. Furthermore, the slide hold groove 34 is formed as slightly extended from the slide groove 33 in the circumferential direction of the rocker shaft 11.

On the other hand, a threaded screw hole 35 is formed on the cylinder head 21 at the position corresponding to the above described positioning groove 32, and a stopper screw 36 is screwed into the threaded screw hole 35. The distal end of the stopper screw 36 is provided such that it may be accommodated within the positioning groove 32, the slide groove 33 and the slide hold groove 34. When the rocker shaft 11 is rotated by the action of the hydraulic cylinder 15, the distal end portion of the stopper screw 36 is caused to abut against each of the both end portions of the positioning groove 32 so as to restrict the rotated position of the rocker shaft 11.

Further, the slide groove 33 and the slide hold groove 34 serve their function when the shim 14b mounted on the stem head of the valves 1 and 2 is changed to adjust the tappet clearance. In particular, it is necessary in changing the shim 14b to slide the rocker shaft 11 toward the outside of the cylinder head 21 against the urging force of the positioning spring 31 to move the low speed rocker arm 7 and the intermediate-high speed rocker arms 8 and 9 in the same direction. At this time, the distal end portion of the stopper screw 36 is moved into the slide groove 33 so that the slide groove 33 allows sliding of the rocker shaft 11. Thereafter, by slightly rotating the rocker shaft 11, the distal end portion of the stopper screw 36 is moved into the slide hold groove 34. As a result, the slide hold groove 34 can hold the slide position of the rocker shaft 11 through its engagement with the stopper screw 36.

In Fig. 5, reference numeral 37 denotes a bearing housing for the cam shaft 6 and numeral 38 denotes a cam shaft housing.

Next, referring to Fig. 9, the rotation of the rocker shaft 11 is carried out by the actuation of the hydraulic cylinder 15 including pistons 40. To each of the pistons 40 is connected a rack 16 which is engaged with a pinion 17 formed to one end of the rocker shaft 11 as shown in Fig. 1. The hydraulic cylinder 15 is provided with a hydraulic

ports 18 and 19 for the low and high speed operations into which the hydraulic pressure from the engine is selectively supplied. As described before and as shown in Fig. 1 and Fig. 9, the rocker shaft 11 and the hydraulic cylinder 15 are disposed to the cylinder head 21 of the engine. The rocker shaft 11 is supported by the rocker shaft bearing portion 30 of the cylinder head 21 to be rotatably. Above the rocker shafts 11 are formed semi-circular holes 22 for receiving the lower half portions of the cam shafts 6 and near the bearing holes 22 a valve guides are formed to form a stud bolt insertion holes 24 as shown in Fig. 6.

Operation and effect of this invention will now be described.

If the rocker shaft 11 is rotated in the direction of the arrow M as shown in Fig. 1 by the actuation of the hydraulic cylinder 15 when the engine is in the low speed region, the thick walled portions 12a and 13a respectively of the eccentric bushings 12 and 13 are positioned diagonally frontward (Fig. 3 and Fig. 7). Thus the cam follower surfaces 8c and 9c of the intermediate-high speed rocker arms 8 and 9 are moved relatively downward in relation to the cam follower surface 7c of the low speed rocker arm 7. Accordingly, a gap is formed between the peripheral surface of the intermediate-high speed cams 4 and 5 and the cam follower surfaces 8c and 9c of the intermediate-high speed rocker arms 8 and 9, and as a result the intermediate-high speed cams 4 and 5 run idle.

Further, since the low speed rocker arm 7 at this time is continuously pushed upward about the axial center of the rocker shaft 11 by the urging force of a valve spring 20, the cam follower surface 7c is brought into contact with the peripheral surface of the low speed cam 3. Therefore, when the cam shaft 6 is rotated, the suction and exhaust valves 1 and 2 are moved in an up and down direction on the basis of the lift characteristic A of the low speed cam 3 as shown in Fig. 10. To other words, the valves 1 and 2 open or close the combustion chamber while securing a lift of the valve which is suitable for the low speed region of the engine.

On the other hand, if the rocker shaft 11 is rotated in the direction of the arrow N as shown in Fig. 1 by the actuation of the hydraulic cylinder 15 when the engine is in the intermediate-high speed region, the thick walled portions 12a and 13a respectively of the eccentric bushings 12 and 13 are brought into the diagonally rearward position (Fig. 4). Thus the cam follower surfaces 8c and 9c of the intermediate-high speed rocker arms 8 and 9 are moved in relation to the cam follower surface 7c of the low speed rocker arm 7 to a position generally above that or at the same level as that, bringing the cam follower surfaces 8c and 9c into contact with

the peripheral surface of the intermediate-high speed cams 4 and 5, respectively.

Here, since as shown in Fig. 10 the intermediate-high speed cams 4 and 5 are formed to have a cam lift which is larger than that of the low speed cam 3, the low speed cam 3 runs idle when the cam shaft 6 is rotated under the condition as shown in Fig. 4 while the intermediate-high speed cams 4 and 5 drive the valves 1 and 2 on the basis the lift characteristic B in Fig. 10 by way of the intermediate-high speed rocker arms 8 and 9, respectively. As a result, the valves 1 and 2 open or close the combustion chamber while securing a valve lift which is suitable for the intermediate-high speed region of the engine.

In such configuration, when the rocker shaft 11 is rotated by the action of hydraulic cylinder 15, rack 16 and pinion 17, the stopper screw 36 is caused to abut against respective end portion of the positioning groove 32. As a result, the rocker shaft 11 is caused to stop at the position where the thick walled portions 12a and 13a of the above described eccentric bushings 12 and 13 are placed at diagonally frontward (Fig. 3) or at the position where the thick walled portions 12a and 13a are placed at diagonally rearward (Fig. 4).

According to the above described embodiment, a cam profile suitable for the low speed region of the engine is formed on the low speed cam 3, a cam profile suitable for the intermediate-high speed region of the engine is formed on the intermediate-high speed cams 4 and 5, the intermediate-high speed rocker arms 8 and 9 are fitted in a rotatable manner respectively onto the eccentric bushings 12 and 13 of the rocker shaft 11 and the low speed rocker arm 7 is directly fitted onto the rocker shaft 11. It is possible by the rotation of the rocker shaft 11 to select a contact from one between the low speed cam 3 and the low speed rocker arm 7 and another occurring respectively between the intermediate-high speed cams 4 and 5 and the intermediate-high speed rocker arms 8 and 9. The suction and exhaust valves 1 and 2 may thus be selectively driven by the low speed cam 3 or by the medium speed cams 4 and 5. Therefore, it is possible to improve the output of an four-stroke cycle engine for a wide range spanning from the low speed region to the intermediate-high speed region of the engine.

Since the selection between the low speed cam 3 and the intermediate-high speed cams 4 and 5 is performed by the rotation of the eccentric bushings 12 and 13, a large stress does not occur at each of these portions when a selection is to be made from the cams 3, 4 and 5. Thus cams 3, 4 and 5 may smoothly be selected.

Further, when the shim 14b is to be changed to adjust the tappet clearance while the cam shaft 6

remains in the assembled manner, the rocker shaft 11 is slid toward the outside of the cylinder head 21 against the urging force of the positioning spring 36 and then is slightly rotated in the peripheral direction. Accordingly, the distal end portion of the stopper screw 36 moves within the slide groove 33 and then to inside the slide hold groove 34. The rocker shaft 11 is caused to stop at such position by an engagement between the stopper screw and the slide hold groove 34 and is held at the position slid toward the outside of the cylinder head 21. In this state, since the low speed rocker arm 7 and the intermediate-high speed rocker arms 8 and 9 are slid away and the rocker arms 7, 8 and 9 are not positioned directly above the shim 14b, the shim 14b may readily be changed.

In this way, because the rocker shaft 11 may be held at its slid position when changing the shim 14b, a worker can change the shim 14b with two hands. Thus such changing work is made easier and may be performed in a shorter time so that changing work of the shim 14b may efficiently be effected.

While the embodiment as above has been described with respect to a case where the cam profile of the intermediate-high speed cams 4 and 5 is one as indicated by the broken line B in Fig. 10, the cam profile of the intermediate-high speed cams 4 and 5 may be adapted to be one as indicated by a broken line B' in Fig. 11 or by a broken line B'' in Fig. 12 so as to change the lift of the valves 1 and 2 at the intermediate-high speed of the engine.

Also, while the description of the above embodiment has been given with respect to a case where a hydraulic cylinder 15 is used as the driving source for the rotation of the rocker shaft 11, a motor may be used as the driving source of rotation where the rocker shaft 11 is driven to be rotated by using power transmission means such as a pulley and belt.

Since the rack 16 connected to the piston 40 of the hydraulic cylinder 15 is engaged, from the upper side, as viewed, with the pinion 17, the hydraulic cylinder 15 and the rack 16 can be assembled with the cylinder head 21 after the rocker shaft 11, the rocker arms 7, 8, 9, the valves 1, 2 and etc. are completely assembled with the cylinder head 21. Furthermore, when the cylinder 15 and the rack 16 are assembled, there is no need of sliding the rocker shaft 11 against the urging force of the positioning spring 31 outwardly of the cylinder head 21, so that the hydraulic cylinder 15 and the rack 16 can be easily assembled. Since the tooth portions of the rack 16 are directed downward, the clogging of the rack 16 with cut chips can be effectively prevented. In addition, in a case where the rack 16 is engaged

with the pinion 17 from the lower side, the hydraulic cylinder 15 is to be positioned to a lower portion in the cam chain chamber 26, whereas in the described embodiment, the hydraulic cylinder 15 is positioned at an upper portion in the cam chain chamber 26, a passage for the dropped head lubrication oil can be ensured in the cam chain chamber 26.

In a modification of the rocker shaft 11 as shown in Fig. 4B, the stopper groove is composed of a stopper portion 32a and a slide portion 32b. The slide portion 32b acts at a time when the shim 14b disposed to the stem head of the valve 1 or 2 is exchanged to adjust the tappet clearance. Except that the slide hold groove is not formed, the structure and the operation of the examples of Figs. 4A and 4B are substantially the same.

In both the examples, when the rocker shaft 11 is rotated by the associated operation of the hydraulic cylinder 15, the rack 16 and the pinion 17, the stopper screw 34 abuts against the ends of the stopper portion of the stopper groove. Accordingly, the the rocker shaft 11 is stopped at either one of the rotated positions at which the thick walled portions of the eccentric bushings 12 and 13 are diagonally forward and at which these thick walled portions are diagonally rearward. At this time, the rotating force of the hydraulic cylinder 15 acts to the end portion of the rocker shaft of the pinion side and the reverse force acts to the other end of the stopper groove side by the stopper screw. According to these rotating and reverse forces, the rocker shaft becomes a state in which the torsion is applied to substantially the entire axial length of the rocker shaft. Accordingly, since the stopper groove is formed to the end portion of the rocker shaft oppsing to the end portion to which the pinion is formed, the torsion is applied to approximately the entire axial length thereof when the engine is driven, thus ensuring the stable operation. Accordingly, even if the respective rocker arms are violently vertically swung, the rocker shaft is never swung together, thus effectively preventing the abrasion of the rocker shaft bearing portion.

Aa has been described, with a valve actuating mechanism in a four-stroke cycle engine according to this invention, an eccentric large-diameter portion is formed on a rocker shaft which is supported in a rotatable manner, second and third rocker arms are fitted onto the eccentric large-diameter portion, and a first rocker arm is located between the second and the third rocker arms and fitted directly onto the rocker shaft. It is thus possible to improve the output of the engine for a wide speed region by selecting from the cams as described above through a rotation of the rocker shaft.

The positioning groove, the slide groove and the slide hold groove are continuously formed on

the rocker shaft, the distal end portion of a stopper screw is accommodated in these grooves and the rocker shaft may thus be held at its slide position by causing the distal end portion of the stopper screw to engage the slide hold groove when the rocker shaft is slid so as to change a shim for adjusting the tappet clearance, whereby facilitating the work for changing of shim and improving the efficiency in changing of shim.

Furthermore, the driving mechanism for rotating the rocker shaft is operatively connected to one end of the rocker shaft and the stopper mechanism for positioning the rotating position of the rocker shaft is disposed to the other end of the rocker shaft, so that the torsion can be always stably maintained throughout substantially entire axial length of the rocker shaft during the operation of the engine, whereby the rocker shaft is never swung by the violent vertical movement of the rocker arms and the abrasion of the rocker shaft bearing portion can be effectively prevented.

In addition, the rack member connected to the hydraulic cylinder of as the driving means is engaged with the pinion formed to one end of the rocker shaft from the upper side of the cylinder head, so that the rocker shaft driving mechanism can be assembled after the rocker shaft, the rocker arms, the suction and exhaust valves and etc. have been completely assembled with the cylinder head without sliding the rocker shaft, thus simplifying the assembling process of the members and mechanisms.

It is to be noted that the present invention is not limited to the described embodiments and many other changes, modifications and combinations may be made without departing from the scopes of the appended claims.

Claims

1. A valve actuating mechanism disposed in a four-stroke cycle engine in which exhaust and suction valves are disposed, comprising:

a cocker shaft rotatably supported to a cylinder head of an engine unit and having eccentric large-diameter portions formed on the way of the rocker shaft;

rocker arm means including a first rocker arm rotatably mounted directly on the rocker shaft and second and third rocker arms rotatably mounted on the eccentric large-diameter portions of the rocker shaft with the first rocker arm being interposed therebetween;

cam means including first, second and third cam members which drives said first, second and third rocker arms, respectively, said second and third cams having same cam profiles and said first cam having a cam profile

different from those of said second and third cams; and

a stopper mechanism for controlling a sliding position of said rocker shaft, said stopper mechanism including a stopper groove formed to said cylinder head, a stopper screw engaged with the stopper groove and a stopper means disposed to one end portion of said rocker shaft.

2. A valve actuating mechanism according to claim 1, wherein said stopper means is composed of a groove means formed to an outer periphery of the one end of the rocker shaft and including a positioning groove extending in a circumferential direction thereof into which a front portion of the stopper screw is fitted for limiting a rotating position of said rocker shaft and a slide groove being formed continuously to the positioning groove and extending in an axial direction of the rocker shaft in and along which the rocker shaft is slid.
3. A valve actuating mechanism according to claim 2, wherein said groove means further comprises a slide hold groove being formed continuously to the slide groove and extending in the circumferential direction of the rocker shaft for holding the slid position thereof.
4. A valve actuating mechanism according to at least one of the preceding claims, wherein said first rocker arm and said first cam are located for a low speed operation and said second and third rocker arms and second and third cams are located for an intermediate-high speed operation.
5. A valve actuating mechanism according to at least one of the preceding claims, wherein said eccentric large-diameter portions are formed by eccentric bushings each having a diameter larger than a diameter of said rocker shaft, said bushings axial centers eccentric from a center of said rocker shaft.
6. A valve actuating mechanism according to at least one of the preceding claims, wherein the first rocker arm is provided with branched distal ends and distal ends of said second and third rocker arms abut against each of the branched distal ends of said first rocker arm through shims.
7. A valve actuating mechanism according to at least one of the preceding claims, wherein said branched distal ends of said first rocker arm are operatively connected to said exhaust and

suction valves disposed in the engine.

8. A valve actuating mechanism disposed in a four-stroke cycle engine in which exhaust and suction valves are disposed, comprising:
 - a rocker shaft rotatably supported to a cylinder head of an engine unit and having eccentric large-diameter portions formed on the way of the rocker shaft;
 - rocker arm means including a first rocker arm rotatably mounted directly on the rocker shaft and second and third rocker arms rotatably mounted on the eccentric large-diameter portions of the rocker shaft with the first rocker arm being interposed therebetween;
 - cam means including first, second and third cam members which drives said first, second and third rocker arms, respectively, said second and third cams having same cam profiles and said first cam having a cam profile different from those of said second and third cams;
 - a drive mechanism connected to one end portion of said rocker shaft for driving said rocker shaft; and
 - a stopper mechanism disposed to another end of said rocker shaft for positioning a rotating position of said rocker shaft.
9. A valve actuating mechanism according to claim 8, wherein said stopper mechanism includes a stopper groove formed to said cylinder head, a stopper screw engaged with the stopper groove and a stopper means disposed to one end portion of said rocker shaft.
10. A valve actuating mechanism according to claim 9, wherein said stopper means is composed of a groove means formed to an outer periphery of the one end of the rocker shaft and including a positioning groove extending in a circumferential direction thereof into which a front portion of the stopper screw is fitted for limiting a rotating position of said rocker shaft and a slide groove being formed continuously to the positioning groove and extending in an axial direction of the rocker shaft in and along which the rocker shaft is slid.
11. A valve actuating mechanism according to claim 10, wherein said groove means further comprises a slide hold groove being formed continuously to the slide groove and extending in the circumferential direction of the rocker shaft for holding the slid position thereof.
12. A valve actuating mechanism according to claim 8, wherein said first rocker arm and said

first cam are located for a low speed operation and said second and third rocker arms and second and third cams are located for an intermediate-high speed operation.

13. A valve actuating mechanism according to claim 8, wherein said eccentric large-diameter portions are formed by eccentric bushings each having a diameter larger than a diameter of said rocker shaft, said bushings axial centers eccentric from a center of said rocker shaft.
14. A valve actuating mechanism according to claim 9, wherein the first rocker arm is provided with branched distal ends and distal ends of said second and third rocker arms abut against each of the branched distal ends of said first rocker arm through shims.
15. A valve actuating mechanism according to claim 9, wherein said branched distal ends of said first rocker arm are operatively connected to said exhaust and suction valves disposed in the engine.
16. A valve actuating mechanism disposed in a four-stroke cycle engine in which exhaust and suction valves are disposed, comprising:
 - a rocker shaft rotatably supported to a cylinder head of an engine unit and having eccentric large-diameter portions formed on the way of the rocker shaft;
 - rocker arm means including a first rocker arm rotatably mounted directly on the rocker shaft and second and third rocker arms rotatably mounted on the eccentric large-diameter portions of the rocker shaft with the first rocker arm being interposed therebetween;
 - cam means including first, second and third cam members which drives said first, second and third rocker arms, respectively, said second and third cams having same cam profiles and said first cam having a cam profile different from those of said second and third cams; and
 - a driving mechanism connected to one end of said rocker shaft for driving the rocker shaft, said driving mechanism including a drive means, a rack member operatively connected to said drive means and a pinion member formed to the one end of said rocker shaft so as to be engageable with said rack member.
17. A valve actuating mechanism according to claim 16, wherein said drive means is a hydraulic cylinder means including a piston member.

18. A valve actuating mechanism according to claim 16, wherein said rack member is engaged with said pinion from an upper side of the cylinder head. 5
19. A valve actuating mechanism according to claim 16 further comprising a stopper mechanism disposed to another end of the rocker shaft for positioning a rotating position of the rocker shaft, said stopper mechanism including a stopper groove formed to said cylinder head, a stopper screw engaged with the stopper groove and a stopper means disposed to one end portion of said rocker shaft. 10
20. A valve actuating mechanism according to claim 19, wherein said stopper means is composed of a groove means formed to an outer periphery of the one end of the rocker shaft and including a positioning groove extending in a circumferential direction thereof into which a front portion of the stopper screw is fitted for limiting a rotating position of said rocker shaft and a slide groove being formed continuously to the positioning groove and extending in an axial direction of the rocker shaft in and along which the rocker shaft is slid. 15
21. A valve actuating mechanism according to claim 20, wherein said groove means further comprises a slide hold groove being formed continuous to the slide groove and extending in the circumferential direction of the rocker shaft for holding the slid position thereof. 20
22. A valve actuating mechanism according to claim 16, wherein said first rocker arm and said first cam are located for a low speed operation and said second and third rocker arms and second and third cams are located for an intermediate-high speed operation. 25
23. A valve actuating mechanism according to claim 16, wherein said eccentric large-diameter portions are formed by eccentric bushings each having a diameter larger than a diameter of said rocker shaft, said bushings axial centers eccentric from a center of said rocker shaft. 30
24. A valve actuating mechanism according to claim 16, wherein the first rocker arm is provided with branched distal ends and distal ends of said second and third rocker arms abut against each of the branched distal ends of said first rocker arm through shims. 35
25. A valve actuating mechanism according to 40

claim 24, wherein said branched distal ends of said first rocker arm are operatively connected to said exhaust and suction valves disposed in the engine. 45

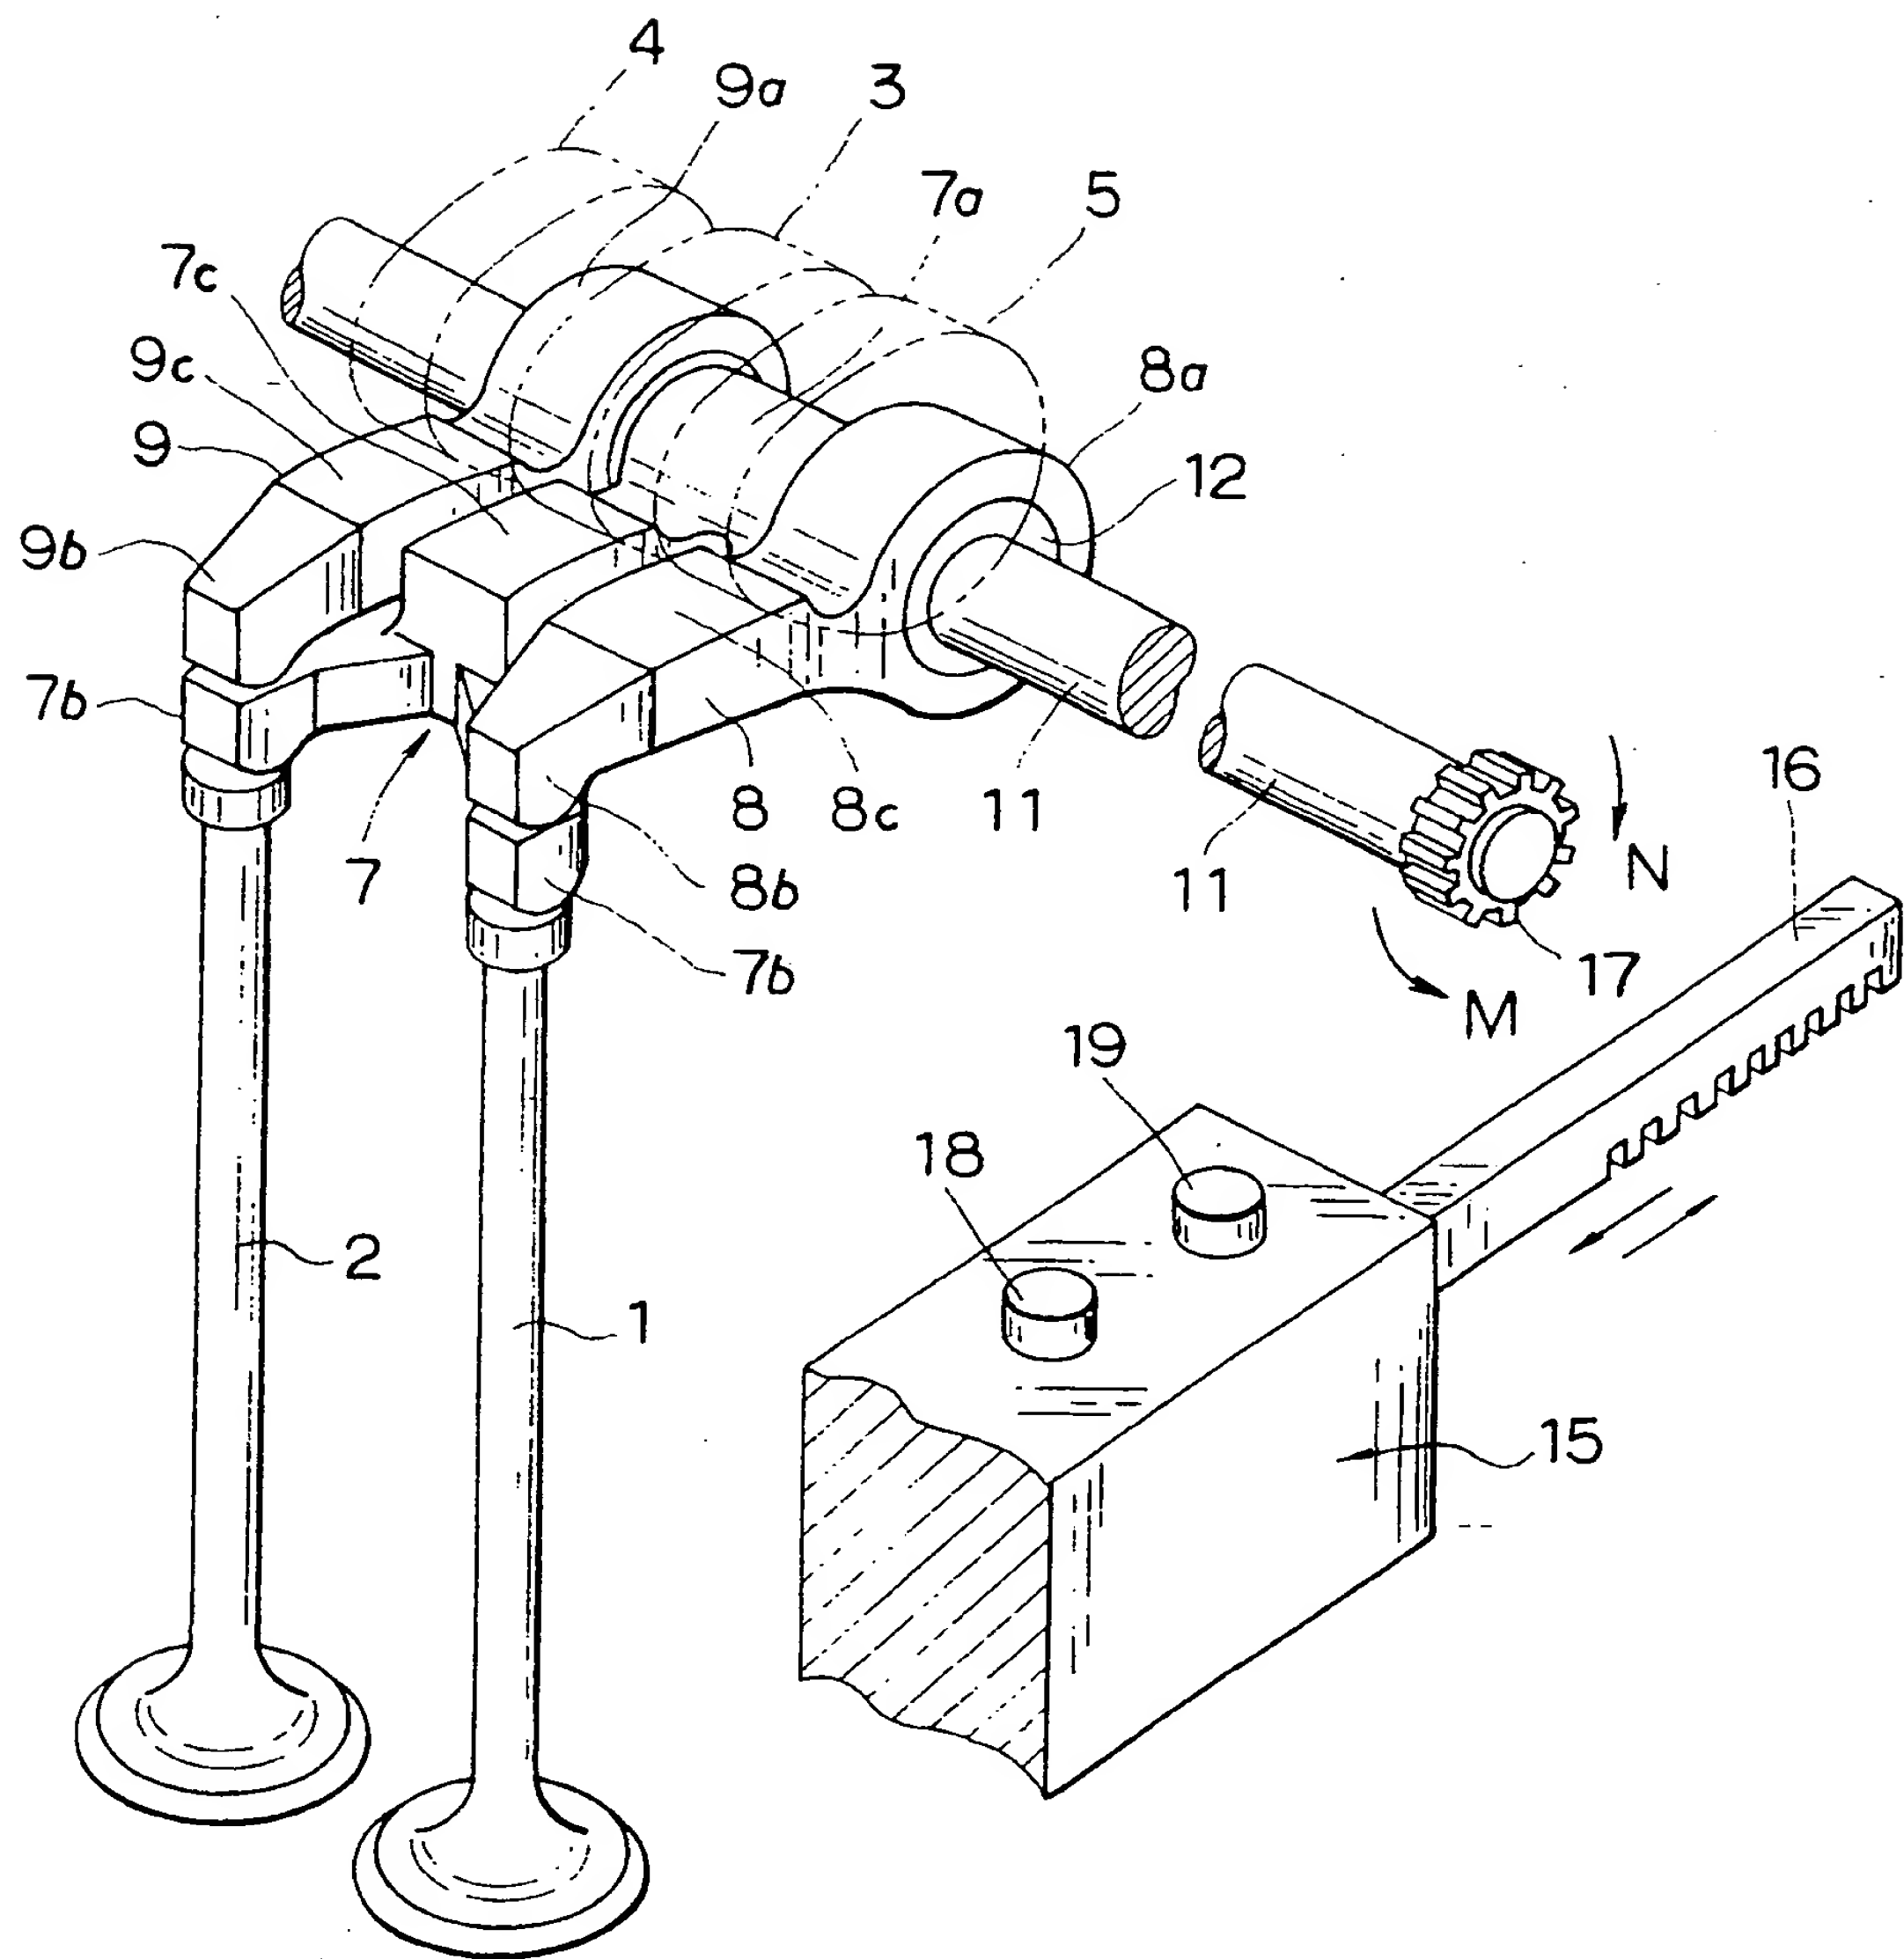


FIG. 1

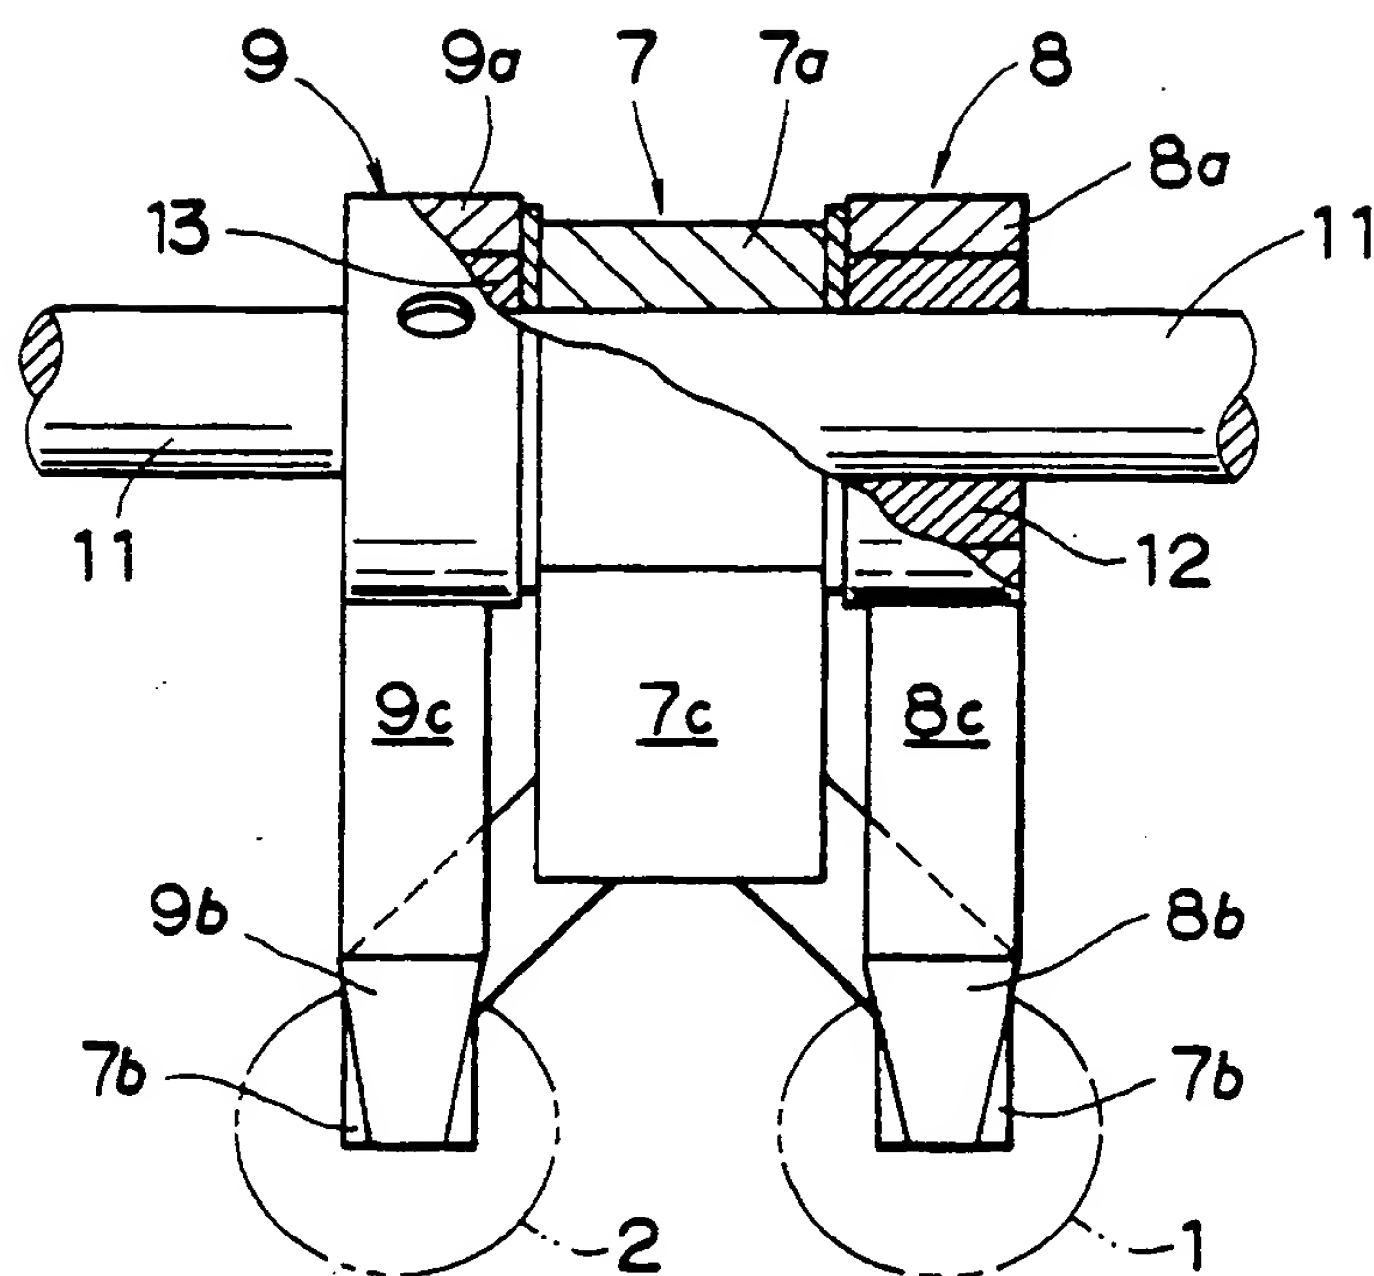


FIG. 2

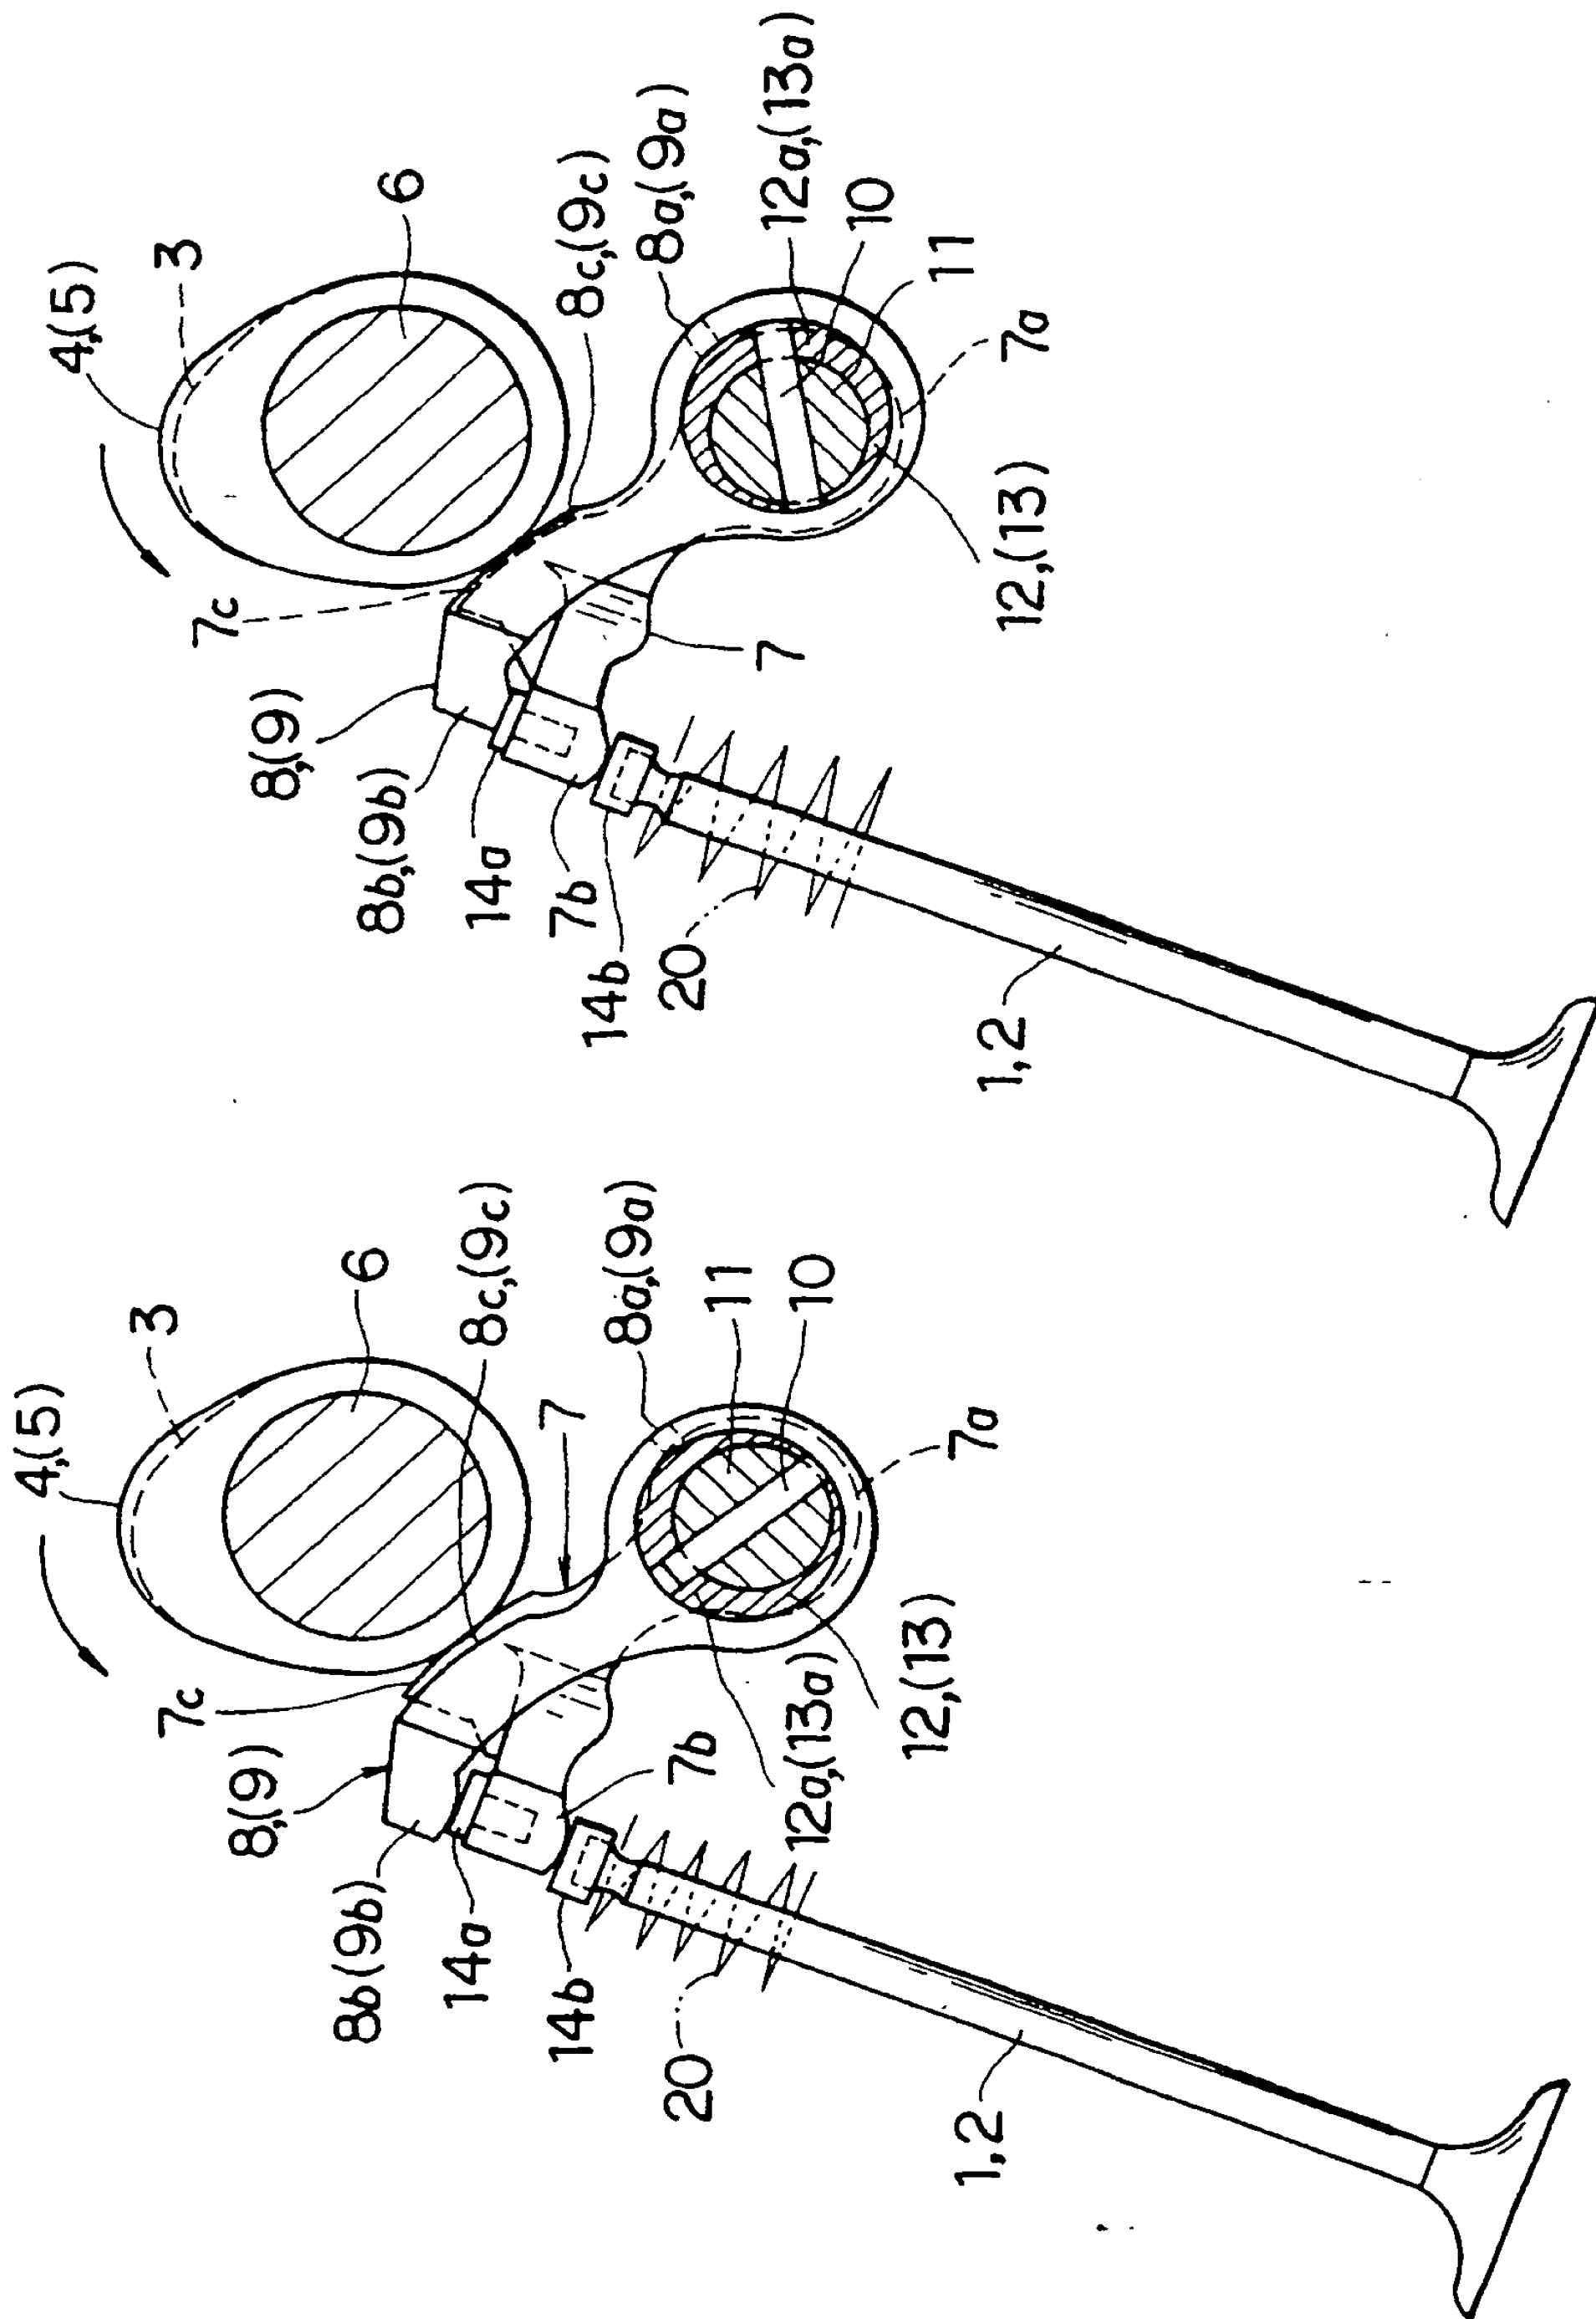


FIG. 3

FIG. 4

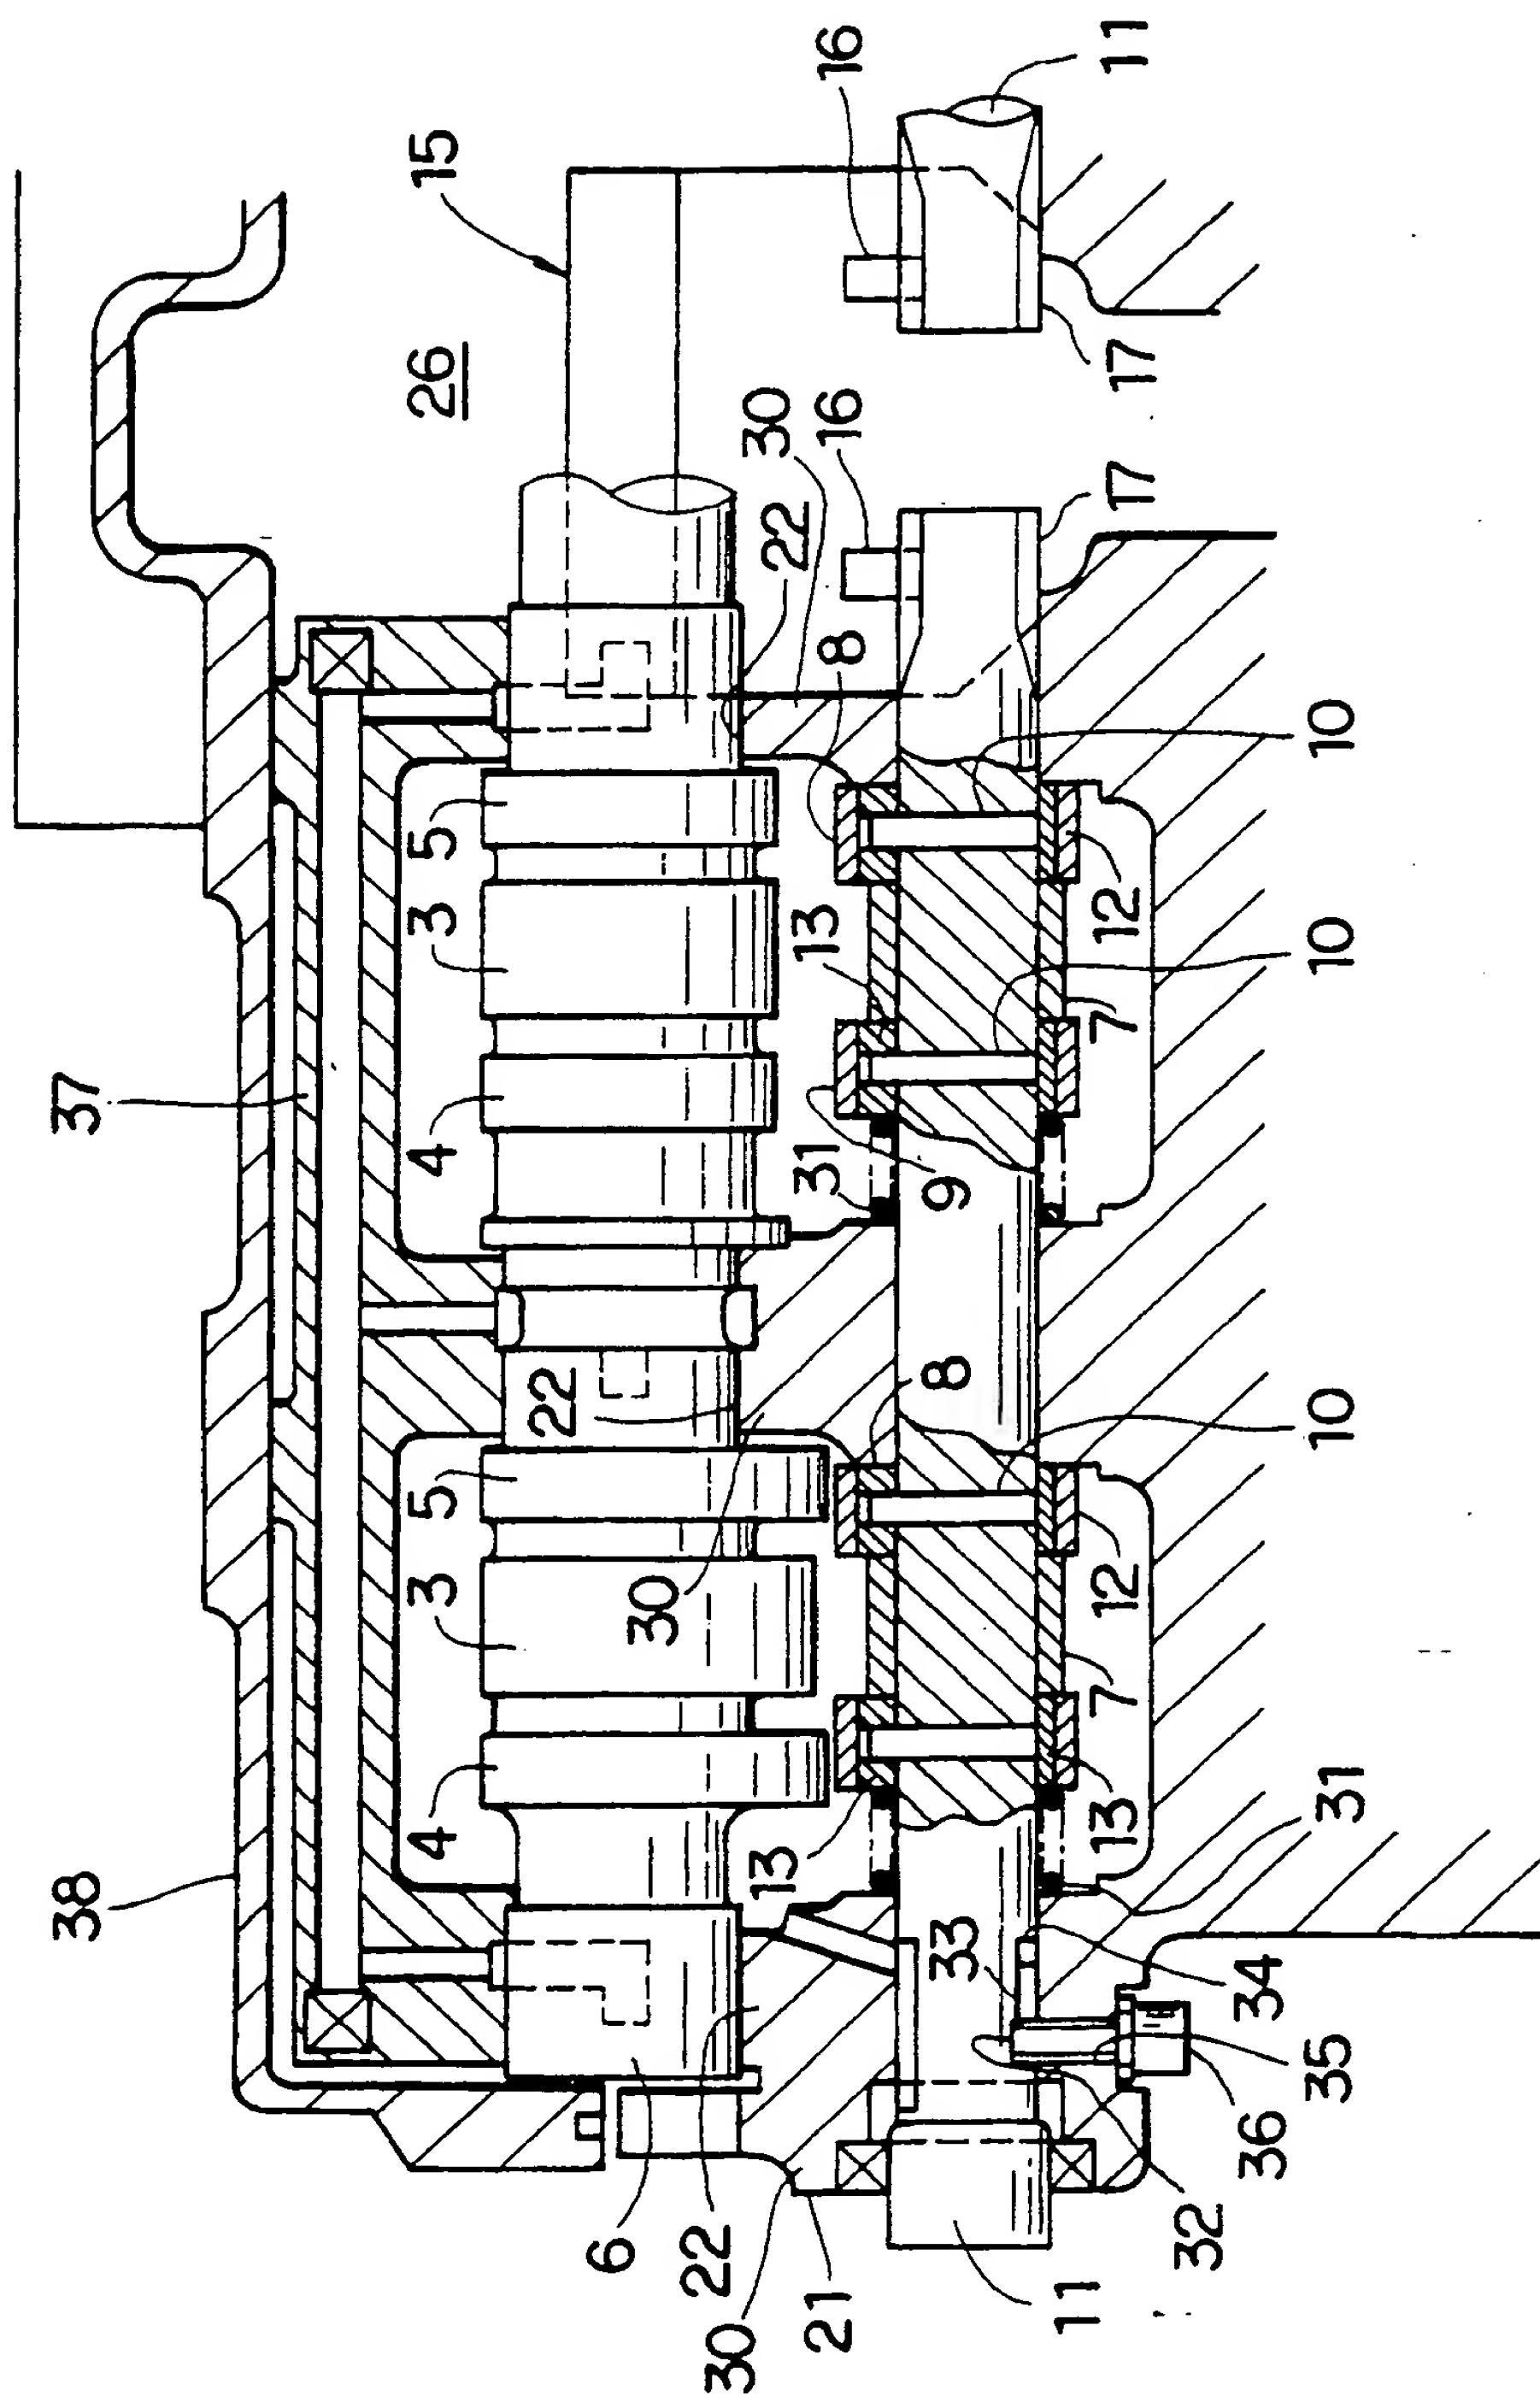


FIG. 5

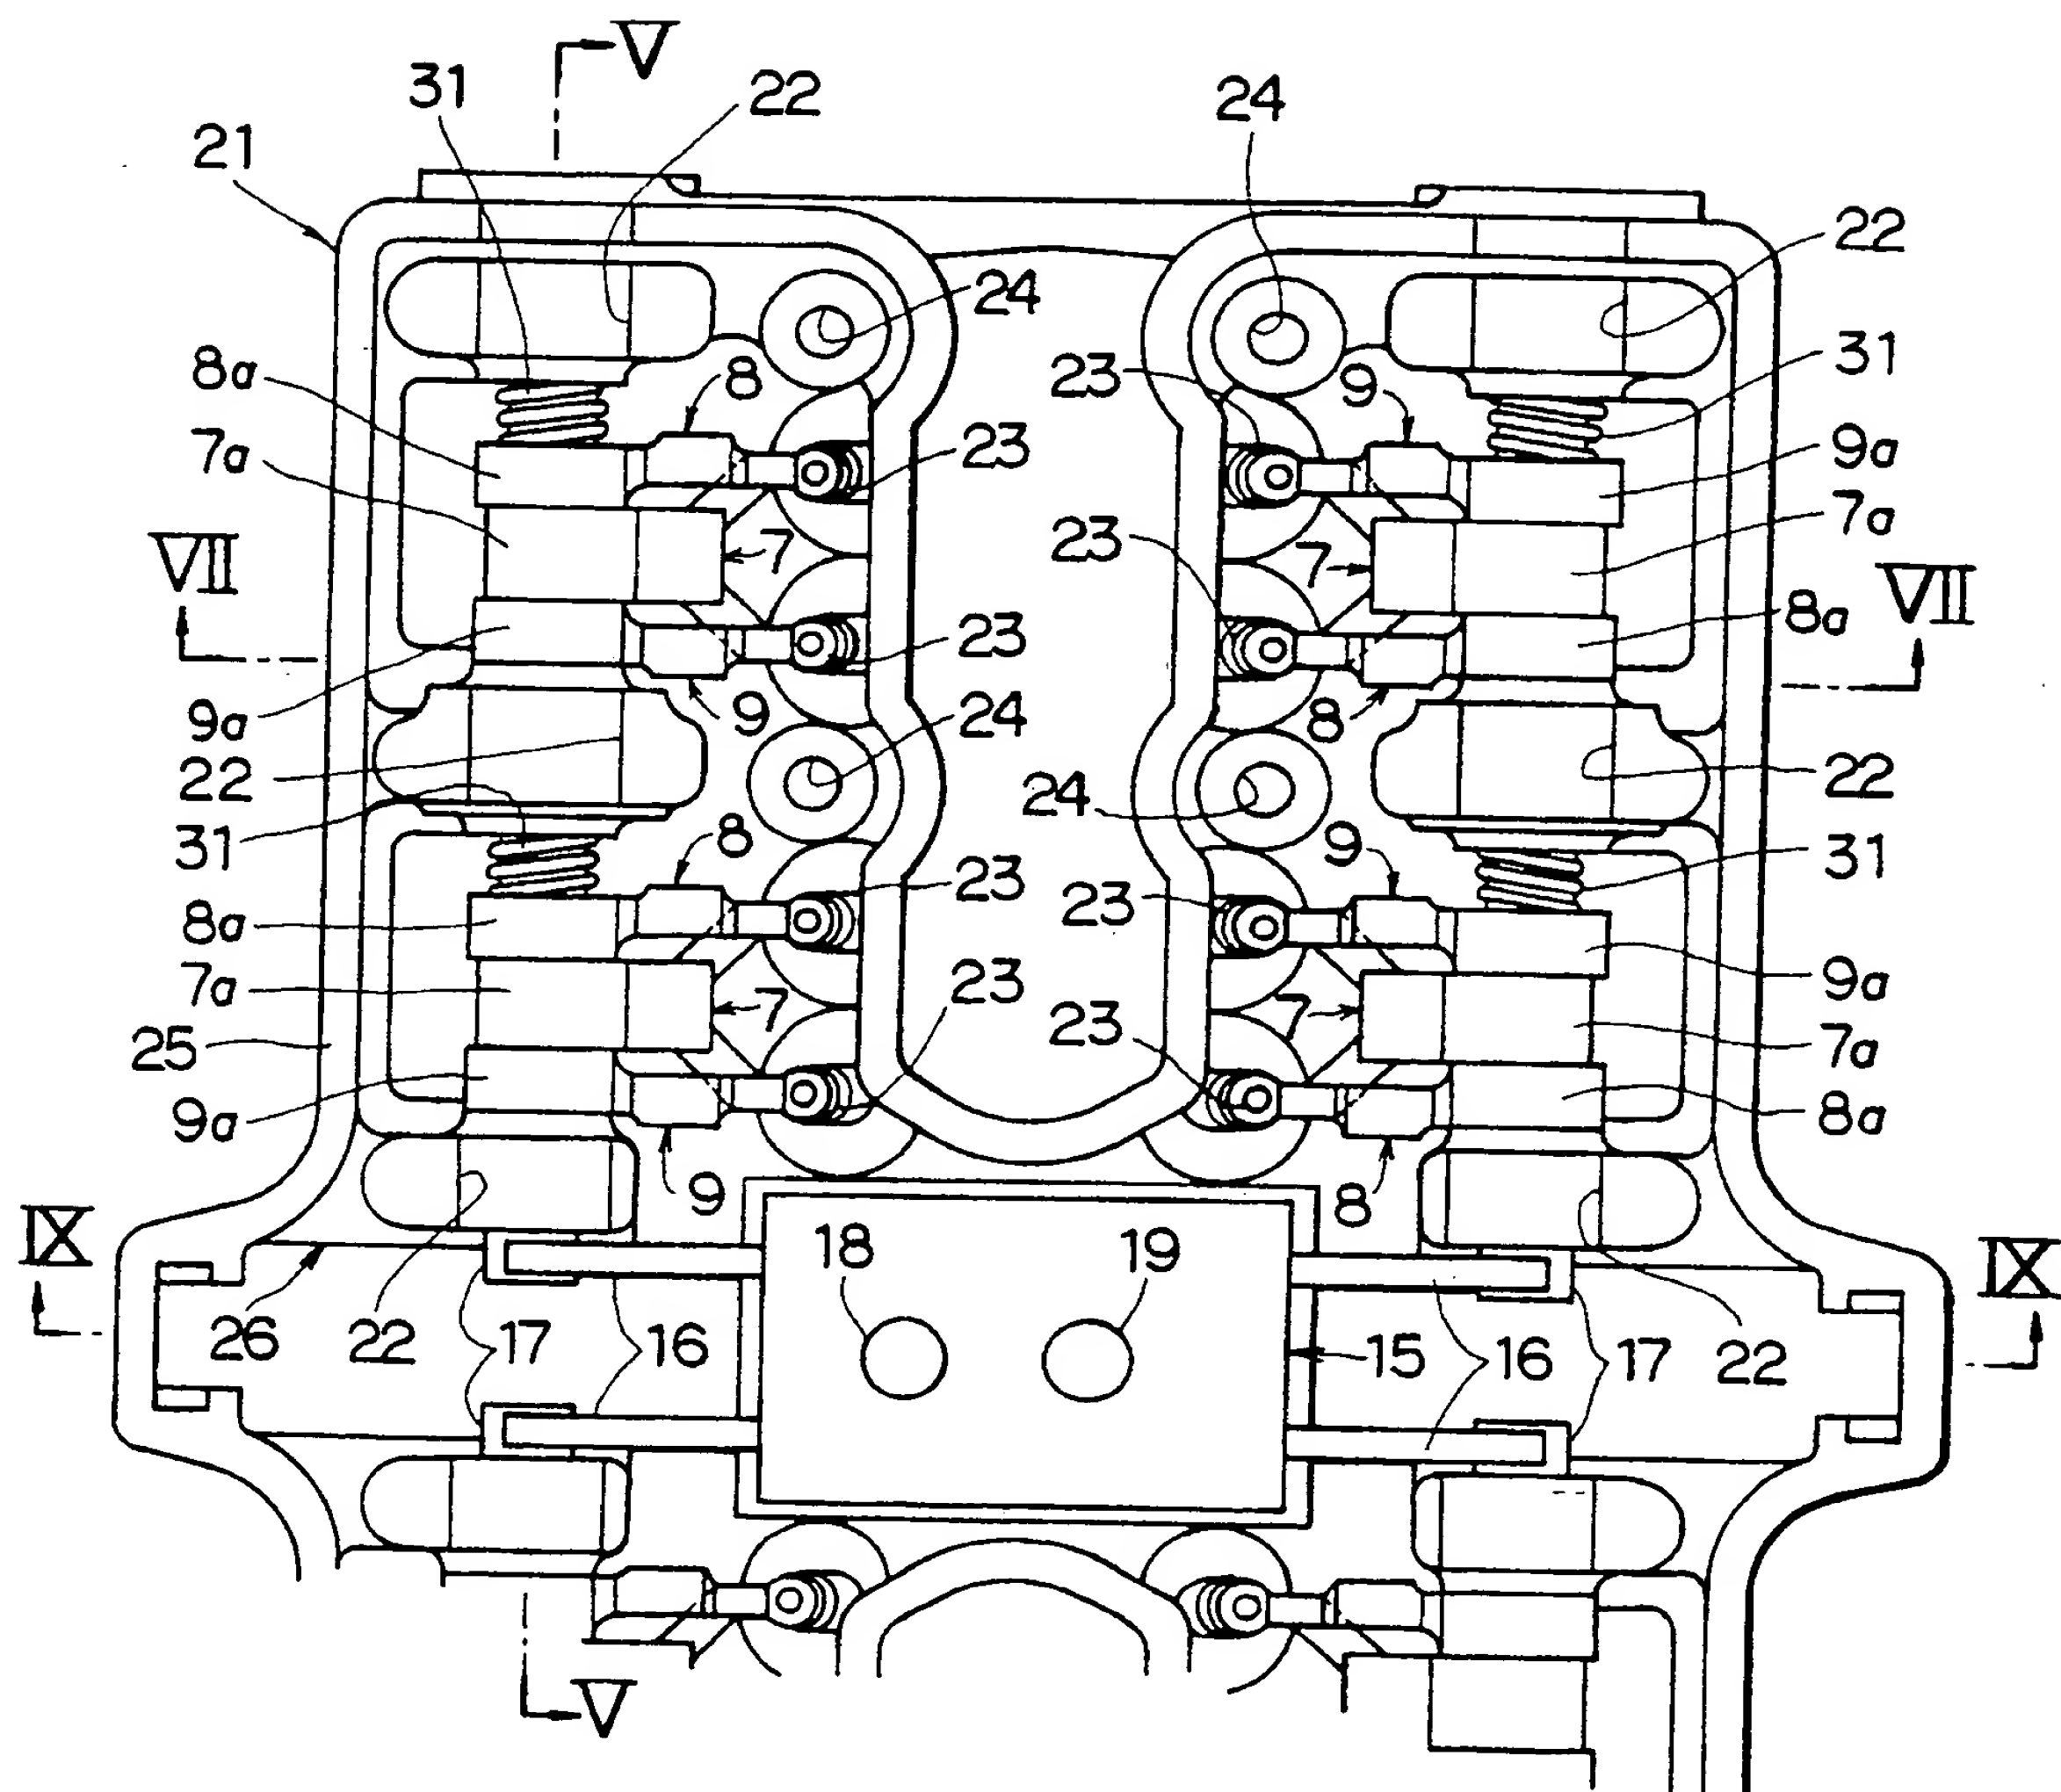


FIG. 6

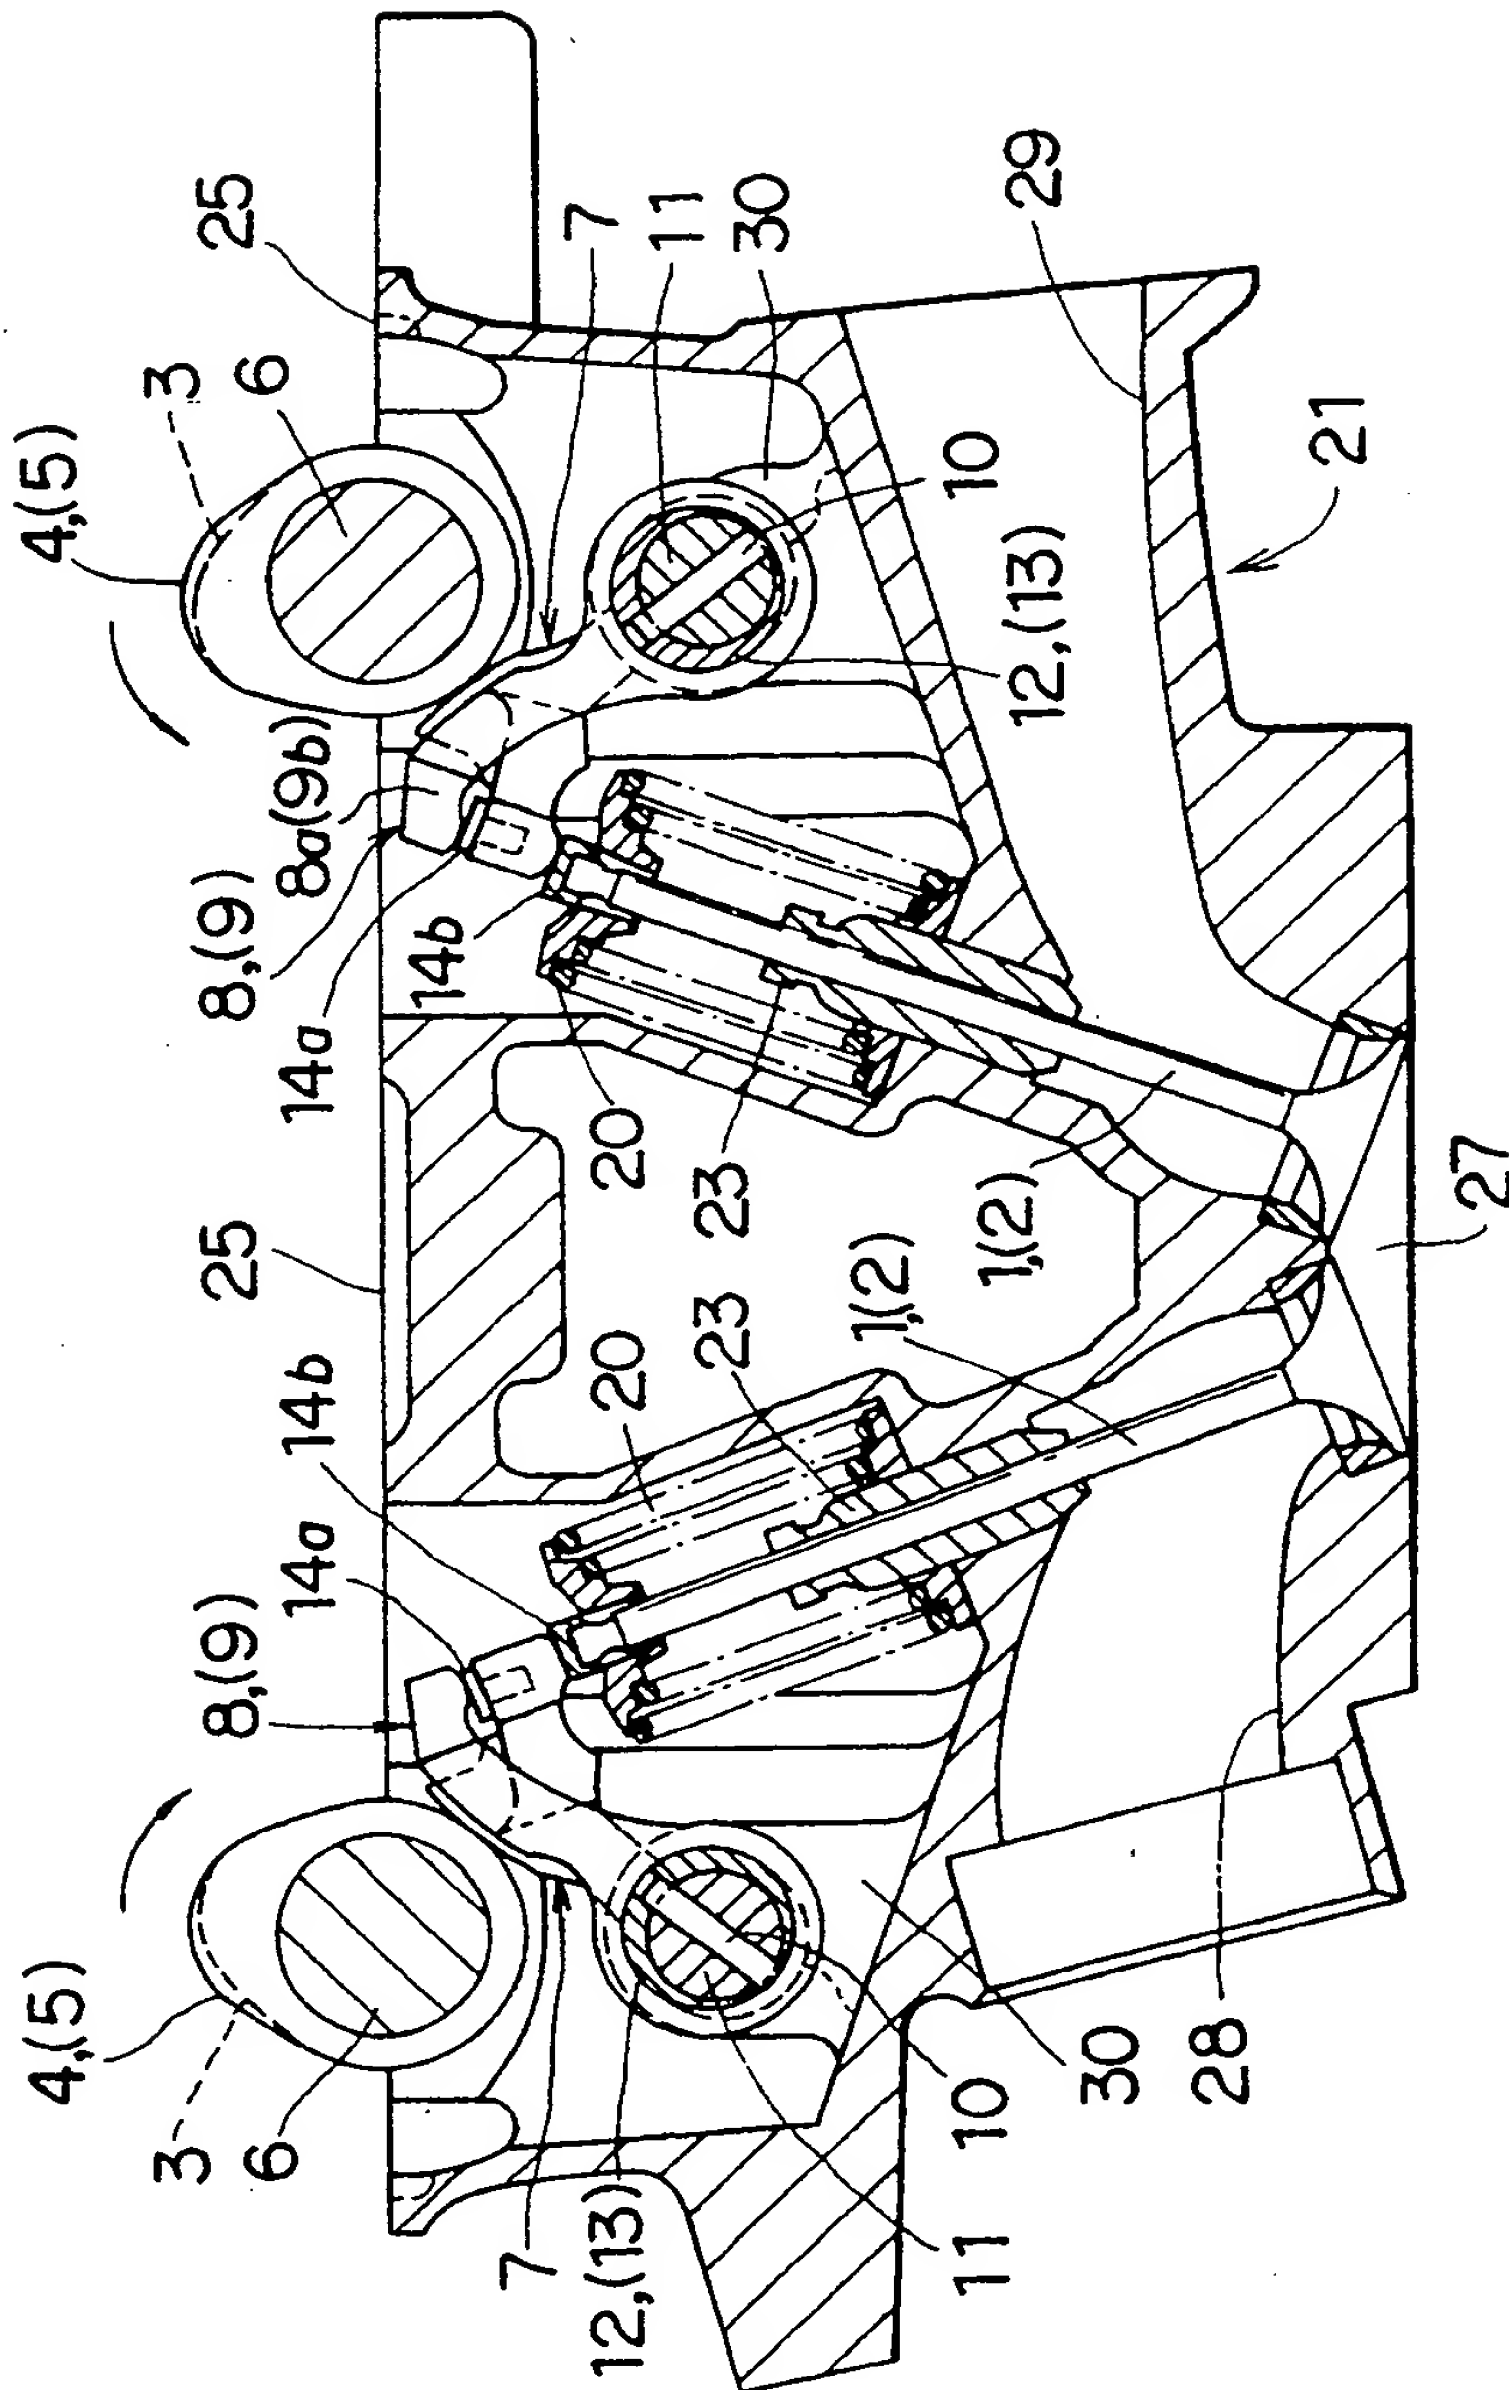


FIG. 7

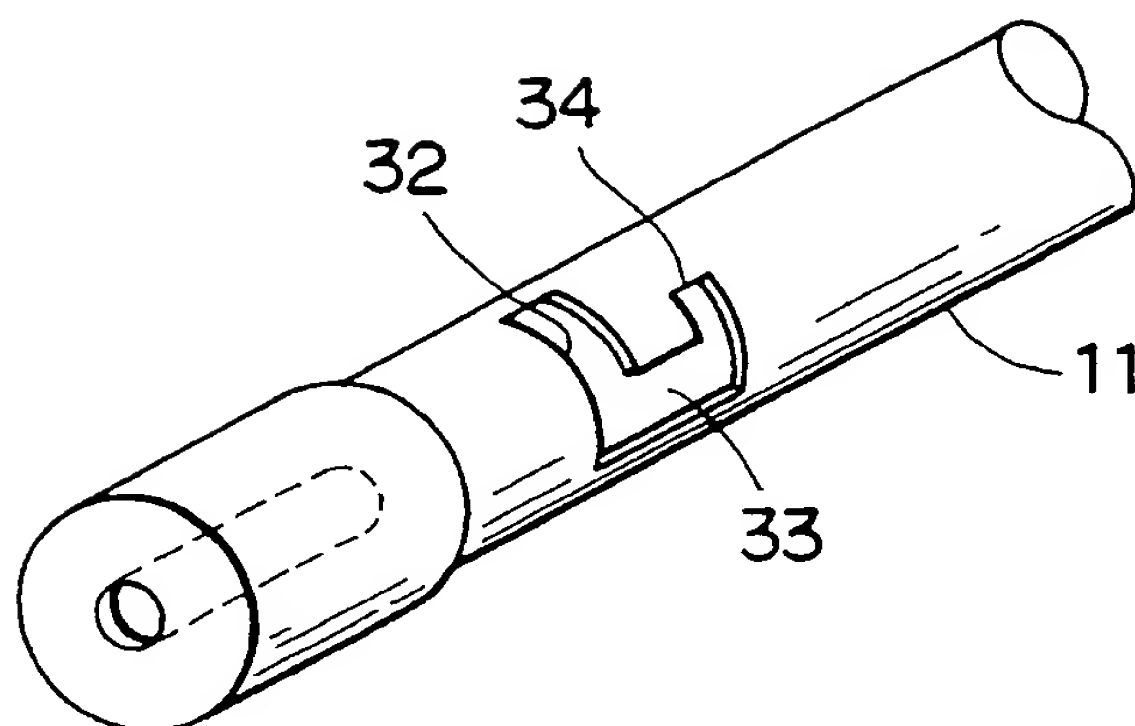


FIG. 8A

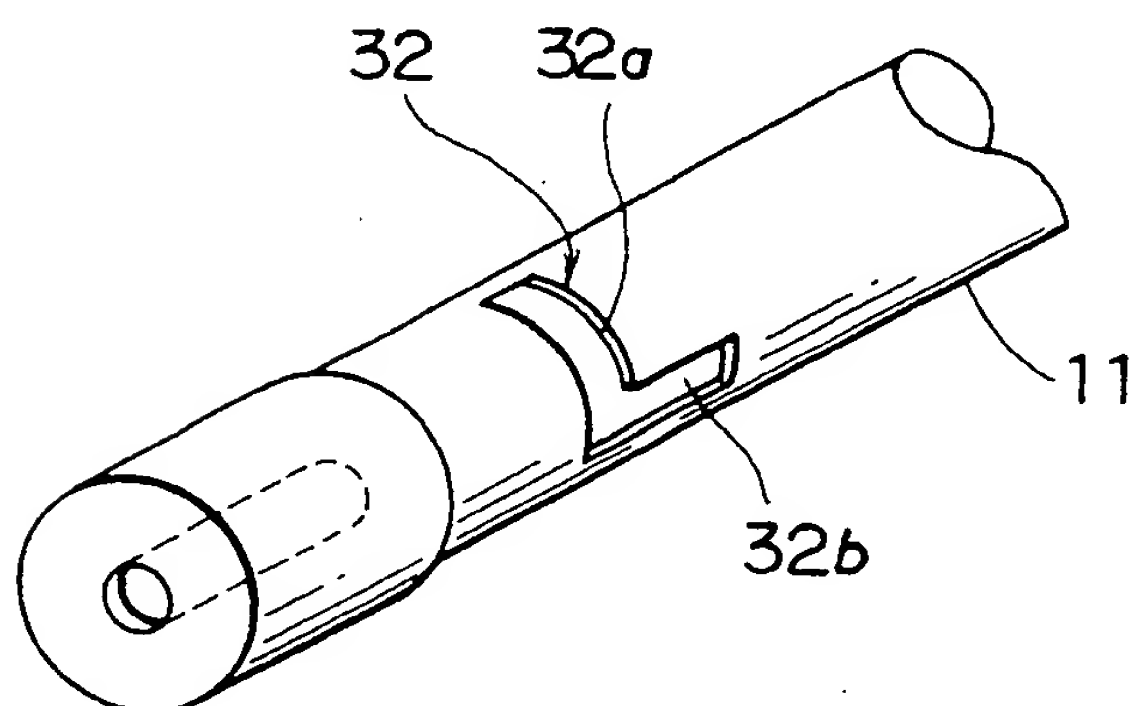


FIG. 8B

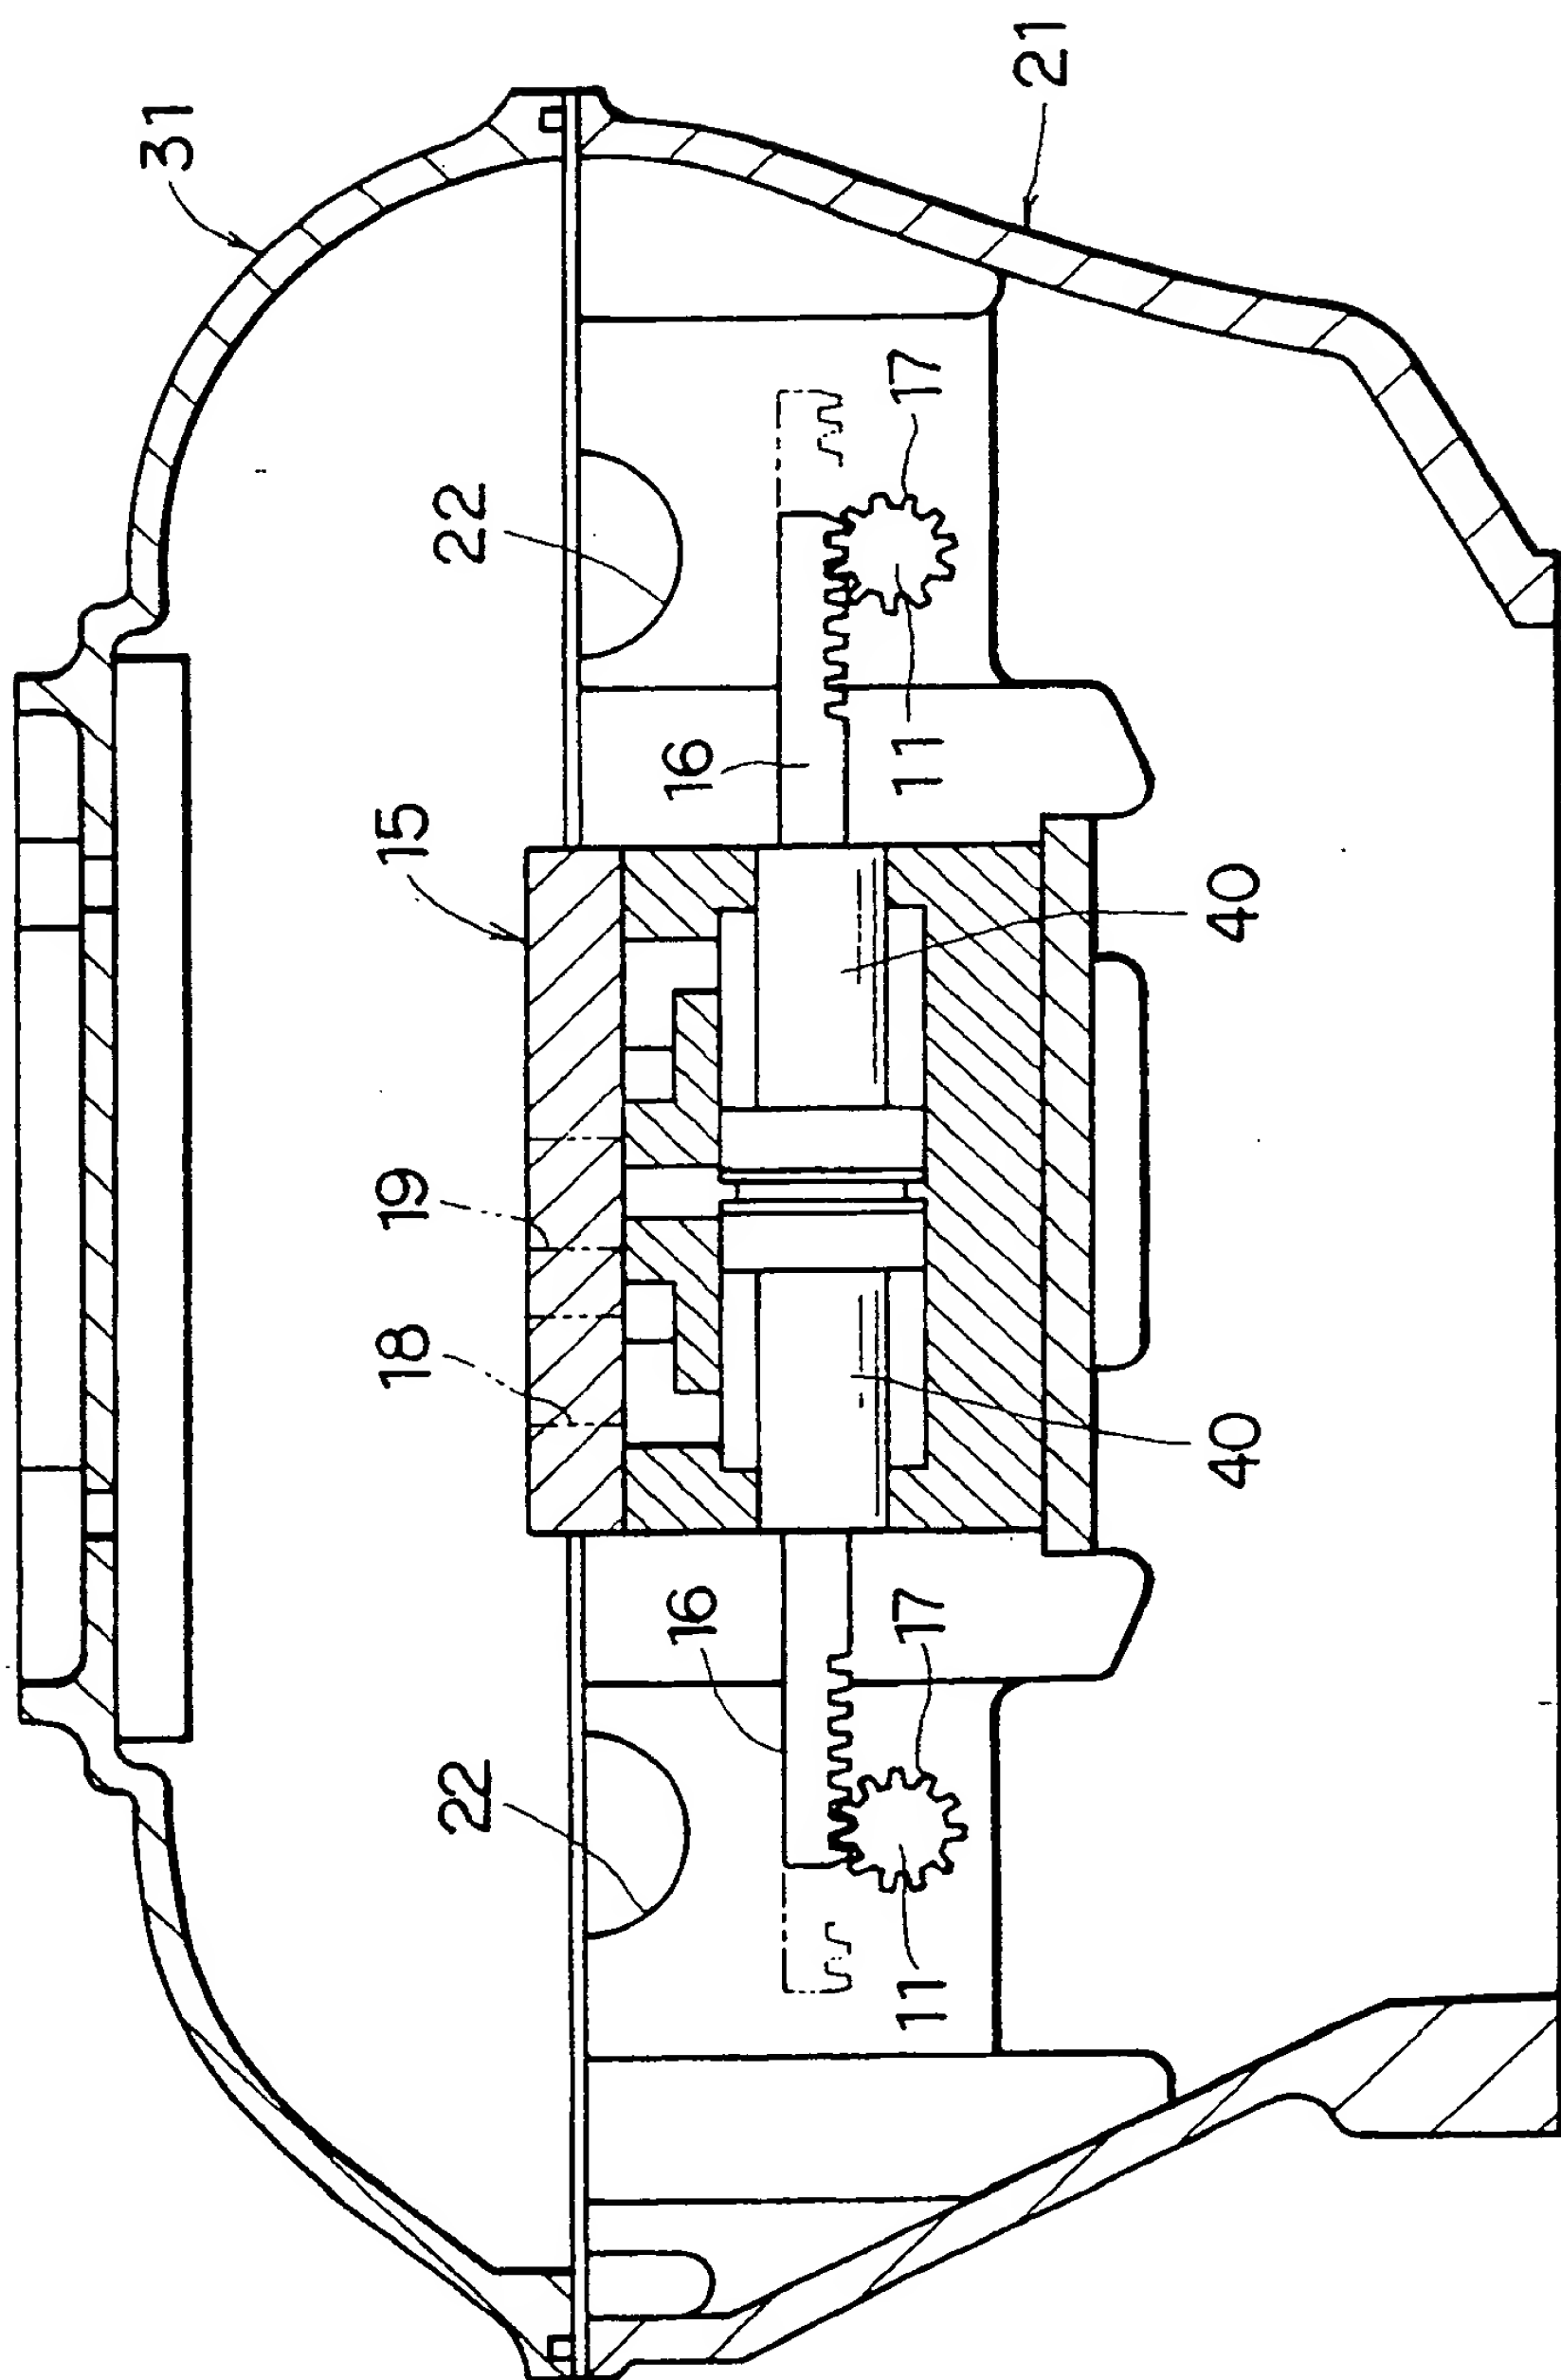


FIG. 9

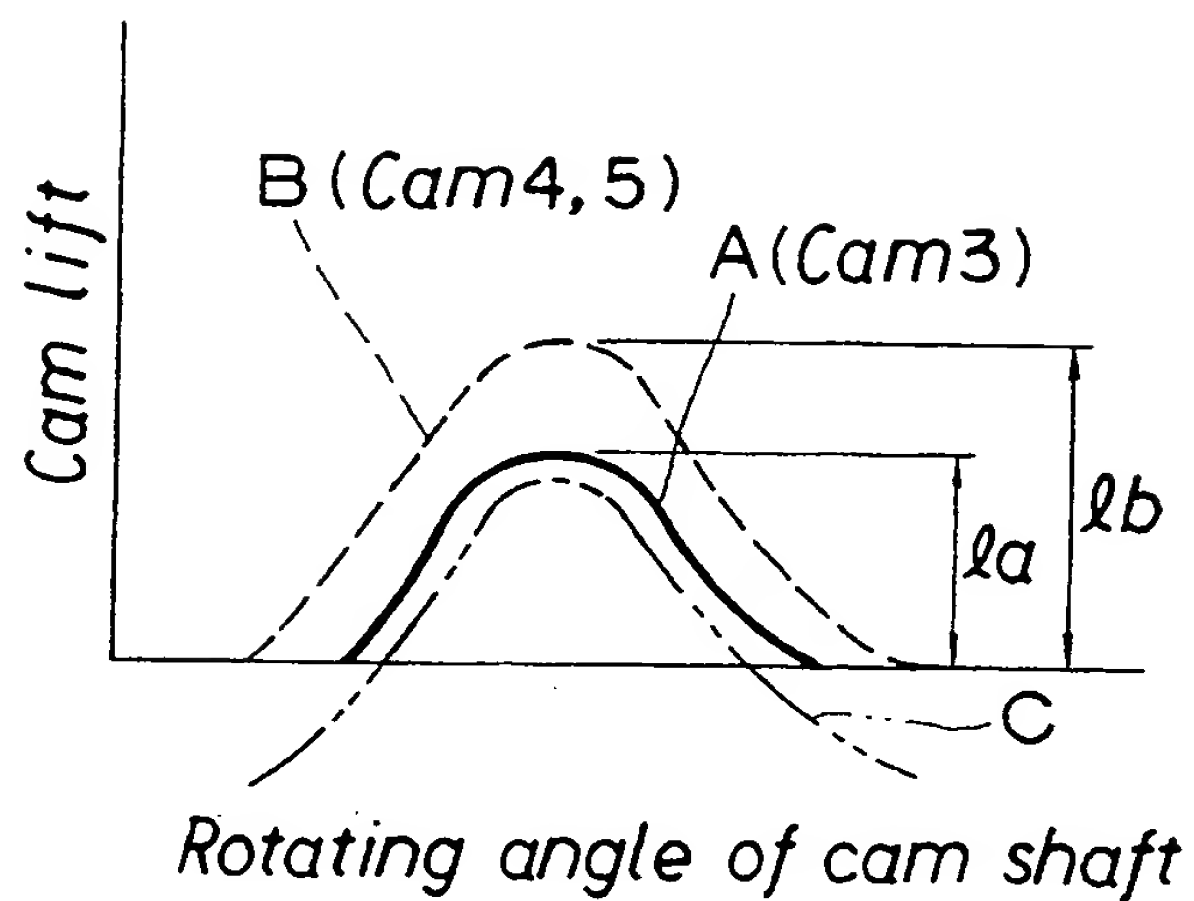


FIG. 10

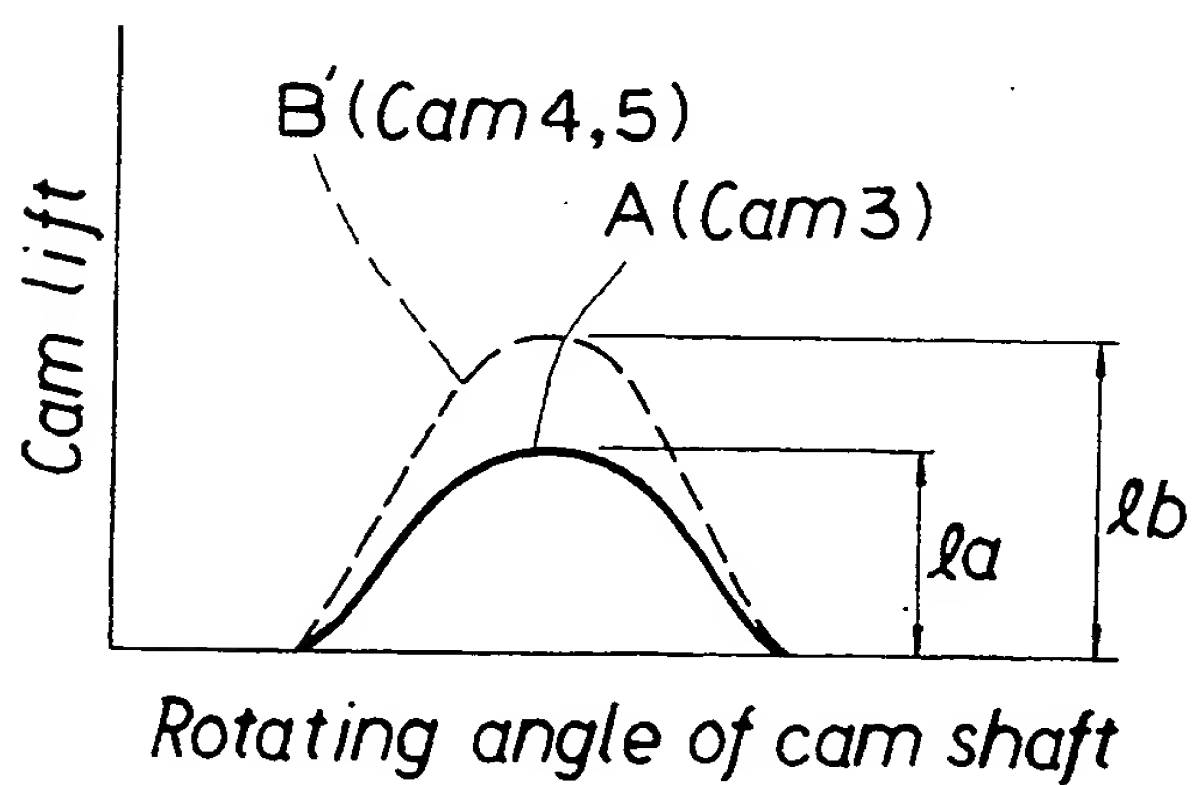


FIG. 11

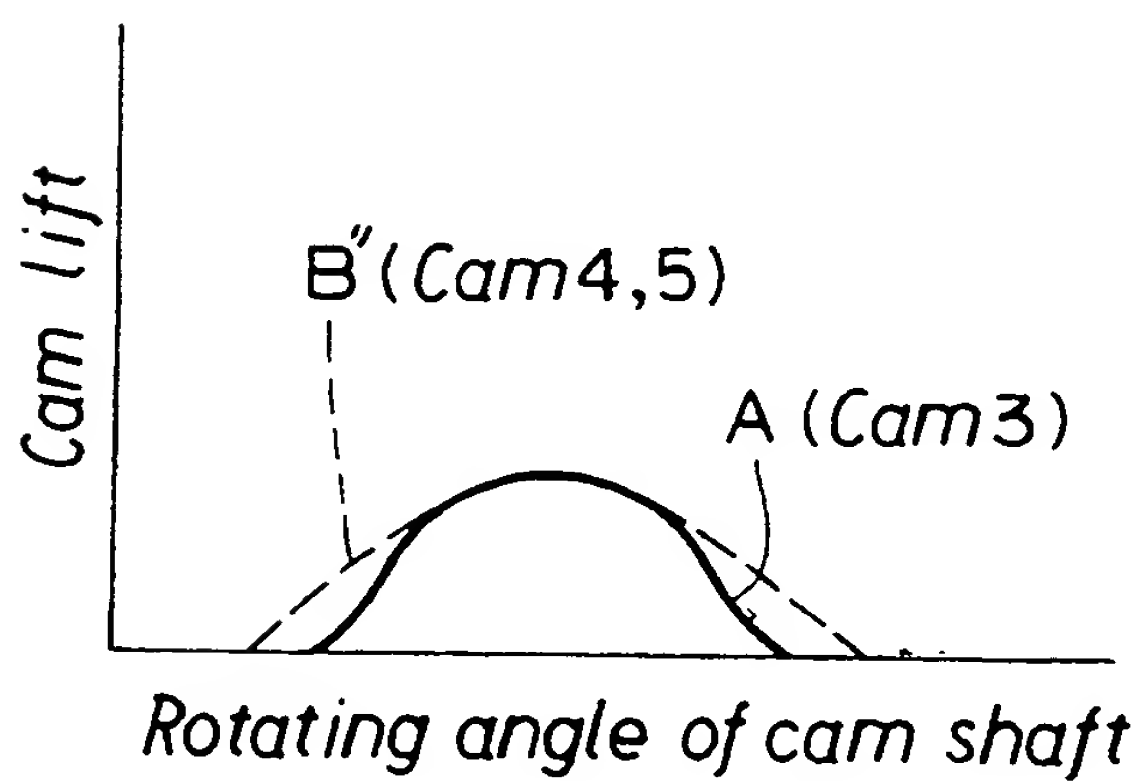


FIG. 12

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 452 671 A3

(12)

EUROPEAN PATENT APPLICATION(21) Application number: **91103733.1**(51) Int. Cl.⁵: **F01L 1/26, F01L 31/22,
F01L 1/20**(22) Date of filing: **12.03.91**

(30) Priority: **14.03.90 JP 24892/90**
20.03.90 JP 27683/90
20.03.90 JP 68276/90

(43) Date of publication of application:
23.10.91 Bulletin 91/43

(84) Designated Contracting States:
DE FR GB

(88) Date of deferred publication of the search report:
01.04.92 Bulletin 92/14

(71) Applicant: **SUZUKI KABUSHIKI KAISHA**

300 Takatsuka, Kamimura
Hamana-Gun, Shizuoka-Ken(JP)


(72) Inventor: **Kaku, Shinji**
1287-1-A201 Higashiwakabayashi, Kamimura
Hamana-Gun, Shizuoka-Ken(JP)
Inventor: **Shinkai, Tatsuya**
319-4, Koyasu-Cho
Hamamatsu-Shi, Shizuoka-Ken(JP)

(74) Representative: **Klunker . Schmitt-Nilson .**
Hirsch
Winzererstrasse 106
W-8000 München 40(DE)

(54) **Valve actuating mechanism in four-stroke cycle engine.**

(57) A valve actuating mechanism disposed in a four-stroke cycle engine in which exhaust and suction valves are disposed, comprises a rocker shaft (11) rotatably supported to a cylinder head (21) of an engine unit and having eccentric large-diameter portions (12,13) formed as bushings on the way of the rocker shaft, rocker arms including a first rocker arm (7) rotatably mounted directly on the rocker shaft and second and third rocker arms (8,9) rotatably mounted on the bushings with the first rocker arm being interposed therebetween, and a cam assembly including first, second and third cam members (3,4,5) which drives the first, second and third rocker arms, respectively. The second and third cams have the same cam profiles and the first cam has a cam profile different from those of the second and third cams. A driving mechanism for rotating the rocker shaft is connected to one end of the rocker shaft and comprises a hydraulic cylinder (15), a rack (16) connected thereto and a pinion (17) formed on the one end of the rocker shaft so as to be engaged with the rack from the upper side of the cylinder head. A stopper mechanism for controlling a sliding position of the rocker shaft is composed of a stopper groove formed to the cylinder head, a stopper screw (36) engaged with the stopper groove (32) and a stopper

member disposed to the other end portion of the rocker shaft.

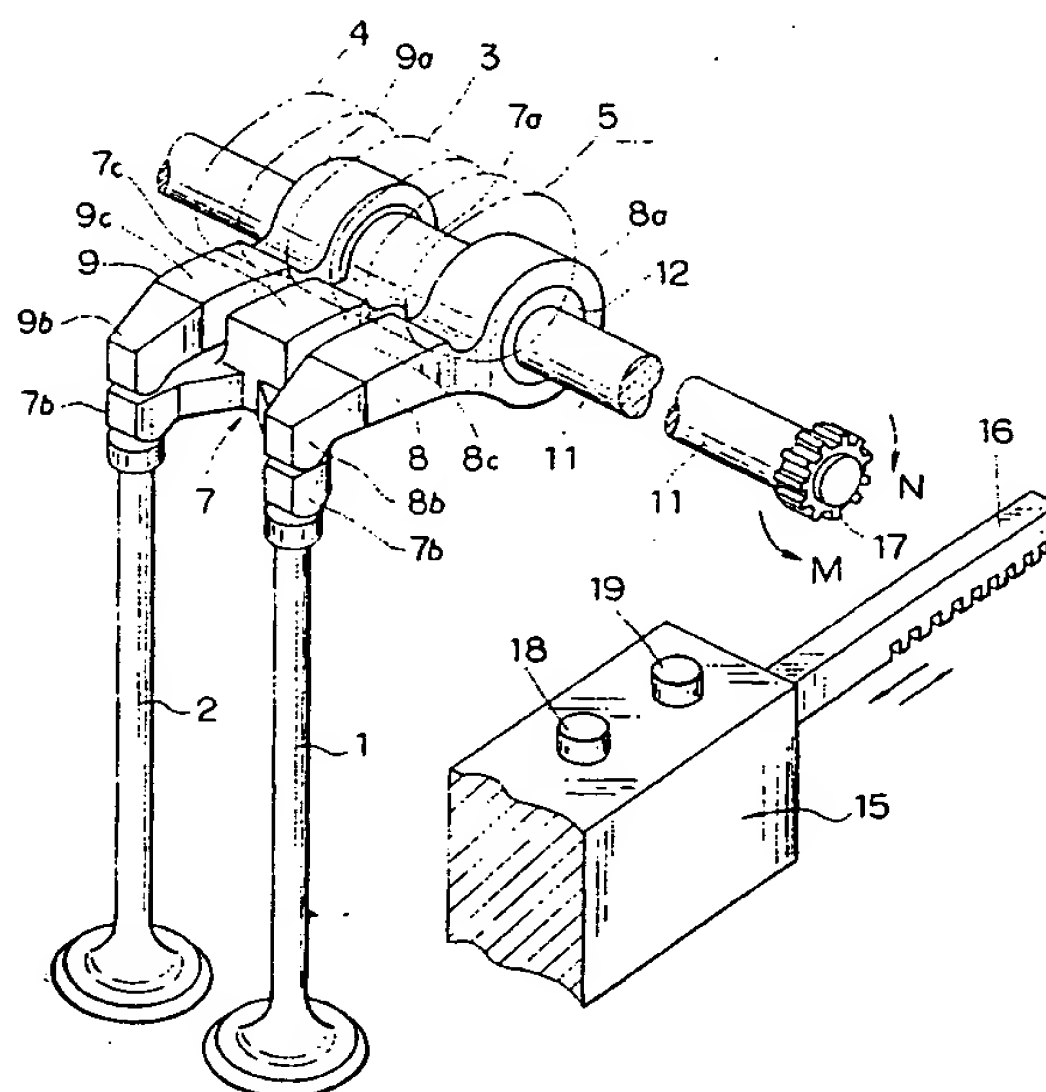**FIG. 1**



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 91 10 3733

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 5)
A	DE-A-3 119 133 (PFEIFFER) * Page 4, lines 14-19; page 5, lines 1-23; figure * ---	1,4,5,8 ,12,13	F 01 L 1/26 F 01 L 31/22 F 01 L 1/20
A	EP-A-0 276 531 (HONDA) * Column 2, line 55 - column 3, line 50; column 11, lines 43-58; figures 2,14 * ---	1,4,5,8 ,12,13	
A,P	PATENT ABSTRACTS OF JAPAN, vol. 14, no. 295 (M-990)[4238], 26th June 1990; & JP-A-2 95 710 (SUZUKI MOTOR CO., LTD) 06-04-1990 * The whole abstract * ---	1,8,16	
X,P	EP-A-0 405 927 (SUZUKI JIDOSHA K.K.) * Column 1, lines 4-7; column 1, line 52 - column 4, line 32; column 11, lines 46-49; figures 1-4 * ---	16,17, 22-25	
A	FR-A- 836 367 (WASEIGE) * Page 3, line 83 - page 4, line 12; figure 4 * -----	18	TECHNICAL FIELDS SEARCHED (Int. Cl.5) F 01 L
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 19-12-1991	Examiner KLINGER T.G.
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ----- & : member of the same patent family, corresponding document			



CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing more than ten claims.

- ☐ All claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for all claims.
- ☐ Only part of the claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid, namely claims:
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirement of unity of invention and relates to several inventions or groups of inventions.

namely:

See sheet -B-

- ☒ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:
- ☐ None of the further search fees has been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:



European Patent
Office

EP 91 10 3733 -B-

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirement of unity of invention and relates to several inventions or groups of inventions, namely:

1. Claims 1-7: Valve actuating means comprising stopper mechanism allowing easy change of shims, said mechanism being located at one end of rocker shaft.
2. Claims 8-15: Idem with drive mechanism connected at other end of rocker shaft.
3. Claims 16-25: Valve actuating means comprising a rack and pinion driving mechanism for driving the rocker shaft.